BLACKHAWK TIRE

THE ROAD IS YOUR PREY

South Hemisphere



PASSENGER & LIGHT TRUCK TIRE CATALOG

2026 PRODUCT CATALOG

PASSENGER

SUMMER


HH01 P04


NEW
HH31 P08


HH16 P10


HU02 P12


NEW
HU71 P16

SUV/4X4

ON ROAD


HV61 P18


HS01 P20


HS02 P22

4X4 OFF ROAD


HA01 P24


A/T P26


HM01 P28

VAN/COMMERCIAL

SUMMER


HC31 P30


HL03 P32

BLACKHAWK TIRE





HH01

Excellent handling, superior comfort, high-speed stability and low running noise provide a great driving experience.



PATTERN DESIGN & FEATURES

Product Design | **Product Performance**



Tread Elements

The tread compound is designed to effectively reduce rolling resistance for an improved fuel economy. Tread pattern offers greater handling for a safer and more comfortable driving experience.



Noise Emission

The tread block pitch order and shoulder grooves effectively reduce running noise and ensure excellent performance.



Safety

The four main grooves and central rib are designed to provide excellent water drainage to improve driving performance for both wet and dry roads.

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
13	175/60R13		77	T		BSW	5.00B	420/A/A	412	300
13	185/60R13		80	T		BSW	5.50B	420/A/A	450	300
13	185/60R13		80	T		WR	5.50B	420/A/A	450	300
13	165/65R13		77	T		BSW	5.00B	420/A/A	412	300
13	165/70R13		83	T	XL	BSW	5.00B	420/A/A	487	340
13	175/70R13		82	T		BSW	5.00B	420/A/A	475	300
13	175/70R13		82	T		WR	5.00B	420/A/A	475	300
13	185/70R13		86	T		BSW	5.50B	420/A/B	530	300
14	165/60R14		75	H		BSW	5J	420/A/A	387	300
14	175/60R14		79	H		BSW	5J	420/A/A	437	300
14	185/60R14		82	H		BSW	5 1/2J	420/A/A	475	300
14	195/60R14		86	H		BSW	6J	420/A/A	530	300
14	205/60R14		88	T		BSW	6J	420/A/A	560	300
14	175/65R14		82	T		BSW	5J	420/A/A	475	300
14	175/65R14		86	T	XL	BSW	5J	420/A/A	530	340
14	175/65R14		86	T	XL	RWL	5J		530	340
14	185/65R14		86	H		BSW	5 1/2J	420/A/A	530	300
14	195/65R14		89	H		BSW	6J	420/A/A	580	300
14	165/70R14		85	T	XL	BSW	5J	420/A/A	515	340
14	175/70R14		88	T	XL	BSW	5J	420/A/A	560	340
14	185/70R14		88	H		BSW	5 1/2J	420/A/A	560	300
14	195/70R14		91	T		BSW	6J	420/A/A	615	300
14	205/70R14		95	T		BSW	6J	420/A/A	690	300
14	205/70R14		98	T	XL	BSW	6J	420/A/A	750	340

BLACKHAWK TIRE

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
15	195/50R15		82	V		BSW	6J	420/A/A	475	300
15	185/55R15		82	V		BSW	6J	420/A/A	475	300
15	195/55R15		85	V		BSW	6J	420/A/A	515	300
15	185/60R15		84	H		BSW	5 1/2J	420/A/A	500	300
15	185/60R15		88	H	XL	BSW	5 1/2J	420/A/A	560	340
15	195/60R15		88	H		BSW	6J	420/A/A	560	300
15	195/60R15		88	V		BSW	6J	420/A/A	560	300
15	205/60R15		91	H		BSW	6J	420/A/A	615	300
15	205/60R15		95	H	XL	BSW	6J	420/A/A	690	340
15	215/60R15		94	H		BSW	6 1/2J	420/A/A	670	300
15	225/60R15		96	V		BSW	6 1/2J	420/A/A	710	300
15	175/65R15		84	H		BSW	5J	420/A/A	500	300
15	185/65R15		88	H		BSW	5 1/2J	420/A/A	560	300
15	185/65R15		92	H	XL	BSW	5 1/2J	420/A/A	630	340
15	195/65R15		91	V		BSW	6J	420/A/A	615	300
15	195/65R15		95	T	XL	BSW	6J	420/A/A	690	340
15	205/65R15		94	H		BSW	6J	420/A/A	670	300
15	205/65R15		94	V		BSW	6J	420/A/A	670	300
15	215/65R15		96	H		BSW	6 1/2J	420/A/A	710	300
15	215/65R15		96	V		BSW	6 1/2J	420/A/A	710	300
15	205/70R15		96	T		BSW	6J	420/A/B	710	300
15	215/70R15		98	H		BSW	6 1/2J	420/A/A	750	300
16	195/50R16		88	V	XL	BSW	6J	420/A/A	560	340
16	205/50R16		87	V		BSW	6 1/2J	420/A/A	545	300
16	225/50R16		92	V		BSW	7J	420/A/A	630	300
16	205/55R16		91	V		BSW	6 1/2J	420/A/A	615	300
16	215/55R16		97	H	XL	BSW	7J	420/A/A	730	340

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
16	195/60R16		89	V		BSW	6J	420/A/A	580	300
16	205/60R16		92	H		BSW	6J	420/A/A	630	300
16	205/60R16		92	V		BSW	6J	420/A/A	630	300
16	215/60R16		95	H		BSW	6 1/2J	420/A/A	690	300
16	215/60R16		95	V		BSW	6 1/2J	420/A/A	690	300
16	225/60R16		98	H		BSW	6 1/2J	420/A/A	750	300
16	205/65R16		95	H		BSW	6J	420/A/A	690	300
16	215/65R16		98	T		BSW	6 1/2J	420/A/A	750	300
16	235/65R16		103	H		BSW	7J	420/A/B	875	300
17	215/45R17		91	W	XL	BSW	7J	420/A/A	615	340
17	225/45R17		94	W	XL	BSW	7 1/2J	420/A/A	670	340
17	235/45R17		97	W	XL	BSW	8J	420/A/A	730	340
17	205/50R17		89	V		BSW	6 1/2J	420/A/A	580	300
17	215/50R17		91	V		BSW	7J	420/A/A	615	300
17	225/50R17		94	V		BSW	7J	420/A/A	670	300
17	215/55R17		94	V		BSW	7J	420/A/A	670	300
17	225/55R17		97	V		BSW	7J	420/A/A	730	300
17	225/55R17		97	W		BSW	7J	420/A/A	730	300
17	215/60R17		96	H		BSW	6 1/2J	420/A/A	710	300
17	215/60R17		96	T		BSW	6 1/2J	420/A/A	710	300
17	225/60R17		99	H		BSW	6 1/2J	420/A/A	775	300
17	235/60R17		102	T		BSW	7J	420/A/A	850	300
17	215/65R17		99	T		BSW	6 1/2J	420/A/B	775	300
18	235/40R18		95	W	XL	BSW	8 1/2J	420/A/A	690	340
18	235/55R18		100	V		BSW	7 1/2J	420/A/A	800	300
18	235/60R18		103	H		BSW	7J	420/A/A	875	300
18	235/60R18		107	V	XL	BSW	7J	420/A/A	975	340



HH31

The STREET-H HH31 is a tire designed for small to medium-sized sedans, offering excellent dry and wet grip, fuel efficiency, and riding comfort.

ECONOMICAL HANDLING COMFORT DRAINAGE

PATTERN DESIGN & FEATURES

Product Design | **Product Performance**



Quiet And Comfortable

Utilizing a new contour design and through footprint and stress simulation analysis, the tire's contact pressure distribution is optimized to be more uniform. This enhances grip, improves quietness and comfort, and prevents irregular wear.



Fuel efficiency

By incorporating a low rolling resistance tread and optimized structural design, rolling resistance is reduced, thereby lowering fuel consumption.



Driving Safety

The tread design incorporates four longitudinal grooves and fully connected lateral grooves, ensuring efficient water evacuation on wet roads and enhancing driving confidence in rainy conditions.

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
13	165/65R13		77	T		BSW	5.00B	360/A/A	412	300
13	165/70R13		79	T		BSW	5.00B	360/A/A	437	300
13	175/60R13		77	T		BSW	5.00B	360/A/A	412	300
13	175/70R13		82	T		BSW	5.00B	360/A/A	475	300
13	185/60R13		80	T		BSW	5.50B	360/A/A	450	300
13	185/70R13		86	T		BSW	5.50B	360/A/A	530	300
14	165/60R14		75	H		BSW	5J	360/A/A	387	300
14	165/70R14		81	T		BSW	5J	360/A/A	462	300
14	175/65R14		86	T	XL	BSW	5J	360/A/A	530	340
14	175/70R14		88	T	XL	BSW	5J	360/A/A	560	340
14	185/60R14		82	H		BSW	5 1/2J	360/A/A	475	300
14	185/65R14		86	H		BSW	5 1/2J	360/A/A	530	300
14	185/70R14		88	H		BSW	5 1/2J	360/A/A	560	300
14	195/60R14		86	H		BSW	6J	360/A/A	530	300
14	195/65R14		89	H		BSW	6J	360/A/A	580	300
14	195/70R14		91	T		BSW	6J	360/A/A	615	300
14	205/60R14		88	T		BSW	6J	360/A/A	560	300
14	205/70R14		98	T	XL	BSW	6J	360/A/A	750	340
15	175/65R15		84	H		BSW	5J	360/A/A	500	300
15	185/55R15		82	V		BSW	6J	360/A/A	475	300
15	185/60R15		88	V	XL	BSW	5 1/2J	360/A/A	560	340
15	185/65R15		88	V		BSW	5 1/2J	360/A/A	560	300
15	195/50R15		82	V		BSW	6J	360/A/A	475	300
15	195/55R15		85	V		BSW	6J	360/A/A	515	300
15	195/60R15		88	V		BSW	6J	360/A/A	560	300
15	195/65R15		91	V		BSW	6J	360/A/A	615	300
15	195/60R15		88	V		BSW	6J	360/A/A	560	300
15	195/65R15		91	V		BSW	6J	360/A/A	615	300
15	195/65R15		91	V		WR	6J	360/A/A	615	300
15	205/60R15		95	H	XL	BSW	6J	360/A/A	690	340
15	205/65R15		94	V		BSW	6J	360/A/A	670	300
15	205/70R15		96	T		BSW	6J	360/A/A	710	300
15	215/65R15		96	V		BSW	6 1/2J	360/A/A	710	300
15	215/70R15		98	H		BSW	6 1/2J	360/A/A	750	300
15	225/60R15		96	V		BSW	6 1/2J	360/A/A	710	300
16	195/50R16		88	V	XL	BSW	6J	360/A/A	560	340
16	195/55R16		91	V	XL	BSW	6J	360/A/A	615	340
16	195/60R16		89	V		BSW	6J	360/A/A	580	300
16	205/50R16		87	V		BSW	6 1/2J	360/A/A	545	300
16	205/55R16		91	V		BSW	6 1/2J	360/A/A	615	300
16	205/60R16		92	V		BSW	6J	360/A/A	630	300
16	205/65R16		95	H		BSW	6J	360/A/A	690	300
16	215/60R16		95	V		BSW	6 1/2J	360/A/A	690	300
16	225/60R16		98	H		BSW	6 1/2J	360/A/A	750	300

BLACKHAWK TIRE

HH16

The HH16 is an HP product designed to improve driving comfort, performance at high speeds and on wet road conditions, and comes with a longer tire life.






ECONOMICAL HANDLING COMFORT DRAINAGE

PATTERN DESIGN & FEATURES

Product Design | **Product Performance**



Driving Comfort

The tread is designed with varying pitches to effectively disperse noise vibrations allowing for a quiet and comfortable ride when driving at high speed.




Handling Performance

Tread ribs utilize a cut section that offers better grip and handling stability. The thin outer groove connects the tire rib and shoulder for better durability, further improving handling stability.



Wet Performance

Two wide central grooves effectively expel water while the tread sipes break through water film for improved braking performance on wet roads.



Long Life

Optimized tread contour design effectively distributes ground pressure to promote even wear, offering a longer tire life.

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
15	195/55R15		85	V		BSW	6J	420/A/A	515	300
15	185/60R15		84	H		BSW	5 1/2J	420/A/A	500	300
15	195/60R15		88	V		BSW	6J	420/A/A	560	300
15	185/65R15		88	H		BSW	5 1/2J	420/A/A	560	300
15	195/65R15		91	V		BSW	6J	420/A/A	615	300
15	205/65R15		94	V		BSW	6J	420/A/A	670	300
16	205/55R16		94	V	XL	BSW	6 1/2J	420/A/A	670	340
16	195/60R16		89	V		BSW	6J	420/A/A	580	300
16	215/60R16		95	V		BSW	6 1/2J	420/A/A	690	300
17	205/55R17		91	V		BSW	6 1/2J	420/A/A	615	300
17	215/55R17		94	W		BSW	7J	420/A/A	670	300
17	225/55R17		101	W	XL	BSW	7J	420/A/A	825	340
17	235/55R17		103	V	XL	BSW	7 1/2J	420/A/A	875	340



BLACKHAWK TIRE

HU02

HU02's tread formulation is specially designed to ensure excellent rolling resistance as well as a stronger apex to prevent damage to the bead.

















PATTERN DESIGN & FEATURES

Product Design	Product Performance



Wet Performance

The tread's four main groves efficiently drain water for improved safety in wet weather conditions.



Handling Performance

The inner tread elements provide stronger grip on both wet and dry roads.



Shoulder Design

Aggressive high angle grooves enhance water drainage to improve wet handling and hydroplaning resistance.

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
16	205/45ZR16		87	W	XL	BSW	7J	300/AA/A	545	340
16	205/50ZR16		87	W		BSW	6 1/2J	300/AA/A	545	300
16	195/55R16		91	V	XL	BSW	6J	300/AA/A	615	340
16	205/55ZR16		94	W	XL	BSW	6 1/2J	300/AA/A	670	340
16	215/55ZR16		97	W	XL	BSW	7J	300/AA/A	730	340
16	225/55ZR16		99	W	XL	BSW	7J	300/AA/A	775	340
16	205/60R16		92	V		BSW	6J	300/AA/A	630	300
16	225/60R16		98	V		BSW	6 1/2J	300/AA/A	750	300
16	235/60R16		100	V		BSW	7J	300/AA/A	800	300
16	205/65R16		95	V		BSW	6J	300/AA/A	690	300
17	205/40ZR17		84	W	XL	BSW	7 1/2J	300/AA/A	500	340
17	215/40ZR17		87	W	XL	BSW	7 1/2J	300/AA/A	545	340
17	245/40ZR17		95	W	XL	BSW	8 1/2J	300/AA/A	690	340
17	205/45ZR17		88	W	XL	BSW	7J	300/AA/A	560	340
17	215/45ZR17		91	W	XL	BSW	7J	300/AA/A	615	340
17	225/45ZR17		94	W	XL	BSW	7 1/2J	300/AA/A	670	340
17	235/45ZR17		97	W	XL	BSW	8J	300/AA/A	730	340
17	245/45ZR17		99	W	XL	BSW	8J	300/AA/A	775	340
17	205/50ZR17		93	W	XL	BSW	6 1/2J	400/AA/A	650	340
17	215/50ZR17		95	W	XL	BSW	7J	300/AA/A	690	340
17	225/50ZR17		98	W	XL	BSW	7J	300/AA/A	750	340
17	235/50ZR17		100	W	XL	BSW	7 1/2J	300/AA/A	800	340
17	215/55ZR17		94	W		BSW	7J	300/AA/A	670	300
17	225/55ZR17		101	W	XL	BSW	7J	300/AA/A	825	340
17	235/55ZR17		103	W	XL	BSW	7 1/2J	300/AA/A	875	340



BLACKHAWK TIRE

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
18	215/35ZR18		84	Y	XL	BSW	7 1/2J	300/AA/A	500	340
18	255/35ZR18		94	Y	XL	BSW	9J	300/AA/A	670	340
18	205/40ZR18		82	W		BSW	7 1/2J	300/AA/A	475	300
18	225/40ZR18		92	W	XL	BSW	8J	300/AA/A	630	340
18	235/40ZR18		95	W	XL	BSW	8 1/2J	300/AA/A	690	340
18	245/40ZR18		97	Y	XL	BSW	8 1/2J	300/AA/A	730	340
18	225/45ZR18		95	Y	XL	BSW	7 1/2J	300/AA/A	690	340
18	235/45ZR18		98	Y	XL	BSW	8J	300/AA/A	750	340
18	245/45ZR18		100	W	XL	BSW	8J	300/AA/A	800	340
18	235/50ZR18		101	W	XL	BSW	7 1/2J	300/AA/A	825	340
19	265/30ZR19		93	Y	XL	BSW	9 1/2J	300/AA/A	650	340
19	275/30ZR19		96	Y	XL	BSW	9 1/2J	300/AA/A	710	340
19	225/35ZR19		88	Y	XL	BSW	8J	300/AA/A	560	340
19	235/35ZR19		91	Y	XL	BSW	8 1/2J	300/AA/A	615	340
19	245/35ZR19		93	Y	XL	BSW	8 1/2J	300/AA/A	650	340
19	255/35ZR19		96	Y	XL	BSW	9J	300/AA/A	710	340
19	275/35ZR19		100	Y	XL	BSW	9 1/2J	300/AA/A	800	340
19	225/40ZR19		93	Y	XL	BSW	8J	300/AA/A	650	340
19	245/40ZR19		98	Y	XL	BSW	8 1/2J	300/AA/A	750	340
19	235/45ZR19		99	W	XL	BSW	8J	300/AA/A	775	340
19	245/45ZR19		102	Y	XL	BSW	8J	300/AA/A	850	340
19	275/45ZR19		108	Y	XL	BSW	9J	300/AA/A	1000	340
19	285/45ZR19		111	Y	XL	BSW	9 1/2J	300/AA/A	1090	340
19	255/50ZR19		107	Y	XL	BSW	8J	300/AA/A	975	340
20	245/30ZR20		90	Y	XL	BSW	8 1/2J	300/AA/A	600	340
20	245/30ZR20		95	Y	XL	BSW	8 1/2J	300/AA/A	690	340

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
20	275/30ZR20		97	Y	XL	BSW	9 1/2J	300/AA/A	730	340
20	225/35ZR20		90	Y	XL	BSW	8J	300/AA/A	600	340
20	245/35ZR20		95	Y	XL	BSW	8 1/2J	300/AA/A	690	340
20	275/40ZR20		106	Y	XL	BSW	9 1/2J	300/AA/A	950	340
20	245/45ZR20		103	Y	XL	BSW	8J	300/AA/A	875	340
20	255/45ZR20		105	Y	XL	BSW	8 1/2J	300/AA/A	925	340
20	275/45ZR20		110	Y	XL	BSW	9J	300/AA/A	1060	340
21	325/30ZR21		108	Y	XL	BSW	11 1/2J	300/AA/A	1000	340
21	285/35ZR21		105	Y	XL	BSW	10J	300/AA/A	925	340
21	295/35ZR21		107	Y	XL	BSW	10 1/2J	300/AA/A	975	340
16	195/55RF16		91	V	XL	BSW	6J	300/A/A	615	340
16	205/55ZRF16		94	W	XL	BSW	6 1/2J	300/AA/A	670	340
16	225/55ZRF16		99	W	XL	BSW	7J	300/A/A	775	340
17	225/45ZRF17		94	W	XL	BSW	7 1/2J	300/AA/A	670	340
17	205/50ZRF17		93	W	XL	BSW	6 1/2J	400/A/A	650	340
17	225/50ZRF17		98	W	XL	BSW	7J	300/A/A	750	340
17	225/55ZRF17		101	W	XL	BSW	7J	300/AA/A	825	340
18	225/40ZRF18		92	W	XL	BSW	8J	300/A/A	630	340
18	245/40ZRF18		97	W	XL	BSW	8 1/2J	300/A/A	730	340
18	225/45ZRF18		95	W	XL	BSW	7 1/2J	300/A/A	690	340
18	245/45ZRF18		100	W	XL	BSW	8J	300/A/A	800	340
18	245/50ZRF18		100	Y		BSW	7 1/2J	300/A/A	800	300
19	235/45ZRF19		99	W	XL	BSW	8J	300/A/A	775	340
19	245/45ZRF19		102	W	XL	BSW	8J	300/A/A	850	340
19	255/50RF19		103	V		BSW	8J	300/A/A	875	300



HU71

The next generation of UHP performance, the HU71 is designed for exceptional handling performance in wet and dry weather while also boasting a longer tread life.





ECONOMICAL HANDLING NOISE RIM PROTECTION ANTI-SKID

PATTERN DESIGN & FEATURES

Product Design | **Product Performance**




Wet Performance

The optimized tread contour effectively expels water for better grip on wet roads.



Exceptional Handling

The interconnected tread shoulder improves shoulder durability for precision turning and handling performance.



Improved Durability

Tread body is equipped with a double-layer ply which helps to protect the sidewall, improve support and promote even tread wear.

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
16	205/55ZR16		91	Y		BSW	6 1/2J	420/A/A	615	300
16	205/55ZR16		94	Y	XL	BSW	6 1/2J	420/A/A	670	340
16	215/55ZR16		97	W	XL	BSW	7J	420/A/A	730	340
16	225/55ZR16		99	W	XL	BSW	7J	420/A/A	775	340
17	205/40ZR17		84	Y	XL	BSW	7 1/2J	420/A/A	500	340
17	205/45ZR17		88	W	XL	BSW	7J	420/A/A	560	340
17	205/50ZR17		93	W	XL	BSW	6 1/2 J	420/A/A	650	340
17	215/45ZR17		91	Y	XL	BSW	7J	420/A/A	615	340
17	215/50ZR17		95	W	XL	BSW	7J	420/A/A	690	340
17	215/55ZR17		98	W	XL	BSW	7J	420/A/A	750	340
17	225/45ZR17		94	Y	XL	BSW	7 1/2J	420/A/A	670	340
17	225/50ZR17		98	W	XL	BSW	7J	420/A/A	750	340
17	225/55ZR17		101	W	XL	BSW	7J	420/A/A	825	340
17	235/45ZR17		97	Y	XL	BSW	8J	420/A/A	730	340
17	235/50ZR17		100	W	XL	BSW	7 1/2J	420/A/A	800	340
17	245/45ZR17		99	Y	XL	BSW	8J	420/A/A	775	340
18	215/45ZR18		93	Y	XL	BSW	7J	420/A/A	650	340
18	215/50ZR18		96	W	XL	BSW	7J	420/A/A	710	340
18	225/45ZR18		95	Y	XL	BSW	7 1/2J	420/A/A	690	340
18	225/40ZR18		92	Y	XL	BSW	8 J	420/A/A	630	340
18	225/50ZR18		99	Y	XL	BSW	7J	420/A/A	775	340
18	235/45ZR18		98	Y	XL	BSW	8J	420/A/A	750	340
18	235/40ZR18		95	Y	XL	BSW	8 1/2J	420/A/A	690	340
18	235/50ZR18		101	Y	XL	BSW	7 1/2J	420/A/A	825	340
18	245/40ZR18		97	Y	XL	BSW	8 1/2J	420/A/A	730	340
18	245/45ZR18		100	Y	XL	BSW	8J	420/A/A	800	340
18	255/35ZR18		94	Y	XL	BSW	9J	420/A/A	670	340
18	255/45ZR18		103	Y	XL	BSW	8 1/2J	420/A/A	875	340
18	275/40ZR18		103	Y	XL	BSW	9 1/2J	420/A/A	875	340
19	225/40ZR19		93	Y	XL	BSW	8J	420/A/A	650	340
19	225/45ZR19		96	Y	XL	BSW	7 1/2J	420/A/A	710	340
19	235/35ZR19		91	Y	XL	BSW	8 1/2J	420/A/A	615	340
19	235/40ZR19		96	Y	XL	BSW	8 1/2J	420/A/A	710	340
19	235/45ZR19		99	Y	XL	BSW	8J	420/A/A	775	340
19	245/35ZR19		93	Y	XL	BSW	8 1/2J	420/A/A	650	340
19	245/40ZR19		98	Y	XL	BSW	8 1/2J	420/A/A	750	340
19	245/45ZR19		102	Y	XL	BSW	8J	420/A/A	850	340
19	255/40ZR19		100	Y	XL	BSW	9J	420/A/A	800	340
19	255/35ZR19		96	Y	XL	BSW	9 J	420/A/A	710	340
19	255/45ZR19		104	Y	XL	BSW	8 1/2J	420/A/A	900	340
19	265/35ZR19		98	Y	XL	BSW	9 1/2J	420/A/A	750	340
19	275/35ZR19		100	Y	XL	BSW	9 1/2J	420/A/A	800	340
19	275/40ZR19		105	Y	XL	BSW	9 1/2J	420/A/A	925	340
19	285/40ZR19		107	Y	XL	BSW	10J	420/A/A	975	340
19	285/30ZR19		98	Y	XL	BSW	10J	420/A/A	750	340
20	235/45ZR20		100	W	XL	BSW	8J	420/A/A	800	340
20	245/35ZR20		95	Y	XL	BSW	8 1/2 J	420/A/A	690	340
20	245/40ZR20		99	Y	XL	BSW	8 1/2J	420/A/A	775	340
20	245/45ZR20		103	Y	XL	BSW	8J	420/A/A	875	340
20	255/45ZR20		105	Y	XL	BSW	8 1/2J	420/A/A	925	340
20	255/40ZR20		101	Y	XL	BSW	9J	420/A/A	825	340
20	275/45ZR20		110	Y	XL	BSW	9J	420/A/A	1060	340
20	275/40ZR20		106	Y	XL	BSW	9 1/2J	420/A/A	950	340
20	275/35ZR20		102	Y	XL	BSW	9 1/2J	420/A/A	850	340
20	305/40ZR20		112	Y	XL	BSW	11J	420/A/A	1120	340
20	315/35ZR20		110	Y	XL	BSW	11J	420/A/A	1060	340



HV61

High performance SUV and light truck tire with excellent durability and handling efficiency.





HANDLING CROSS-COUNTRY BRAKING WEAR RESISTANCE

PATTERN DESIGN & FEATURES

Product Design | **Product Performance**




Braking Performance

The optimized groove design and pattern rigidity improves overall braking performance on both dry and wet surfaces.



Driving Comfort

Unique soft tread compound improves tire flexibility for a more comfortable driving experience.



Improved Tire Life

Improved ground pressure distribution promotes even wear to extend overall tire life.

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
16	215/65R16		98	H		BSW	6 1/2J	640/A/A	750	300
16	215/70R16		100	H		BSW	6 1/2J	640/A/A	800	300
16	225/70R16		103	H		BSW	6 1/2J	640/A/A	875	300
16	245/70R16		111	H	XL	BSW	7J	640/A/A	1090	340
16	265/70R16		112	H		BSW	8J	640/A/A	1120	300
16	275/70R16		114	H		BSW	8J	640/A/A	1180	300
17	215/60R17		96	H		BSW	6 1/2J	640/A/A	710	300
17	225/60R17		99	V		BSW	6 1/2J	640/A/A	775	300
17	225/65R17		102	V		BSW	6 1/2J	640/A/A	850	300
17	235/65R17		108	V	XL	BSW	7J	640/A/A	1000	340
17	265/65R17		112	H		BSW	8J	640/A/A	1120	300
17	265/70R17		115	H		BSW	8J	640/A/A	1215	300
17	275/65R17		115	H		BSW	8J	640/A/A	1215	300
17	285/65R17		116	H		BSW	8 1/2J	640/A/A	1250	300
18	215/55R18		99	V	XL	BSW	7J	640/A/A	775	340
18	225/55R18		102	V	XL	BSW	7J	640/A/A	850	340
18	225/60R18		100	H		BSW	6 1/2J	640/A/A	800	300
18	235/55R18		104	V	XL	BSW	7 1/2J	640/A/A	900	340
18	235/60R18		107	V	XL	BSW	7J	640/A/A	975	340
18	245/60R18		105	V		BSW	7J	640/A/A	925	300
18	255/55R18		109	V	XL	BSW	8J	640/A/A	1030	340
18	255/70R18		116	H	XL	BSW	7 1/2J	640/A/A	1250	340
18	265/60R18		110	V		BSW	8J	640/A/A	1060	300
18	265/65R18		114	H		BSW	8J	640/A/A	1180	300
18	275/65R18		116	H		BSW	8J	640/A/A	1250	300
19	245/55R19		103	V		BSW	7 1/2J	640/A/A	875	300
19	265/55R19		109	V		BSW	8 1/2J	640/A/A	1030	300
20	265/55R20		113	V	XL	BSW	8 1/2J	640/A/A	1150	340
20	275/55R20		117	H	XL	BSW	8 1/2J	640/A/A	1285	340
20	275/60R20		115	H		BSW	8J	640/A/A	1215	300

BLACKHAWK TIRE



HS01

Specially designed UHP SUV tire.





HANDLING DRAINAGE NOISE BRAKING HIGH DURABILITY

PATTERN DESIGN & FEATURES

Product Design	Product Performance



Safety

The center rib design provides greater traction for safer acceleration and braking.



Wear Resistance

The silicon compound tread improves wear resistance.



Comfortable Ride

The tread block pitch and built-in sipes reduce tire vibration and noise for a more comfortable ride.

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
17	235/55R17		103	W	XL	BSW	7 1/2J	280/AA/A	875	340
18	275/40R18		103	W	XL	BSW	9 1/2J	280/AA/A	875	340
18	235/50R18		97	V		BSW	7 1/2J	280/AA/A	730	300
18	225/55R18		102	W	XL	BSW	7J	280/AA/A	850	340
18	235/55R18		104	W	XL	BSW	7 1/2J	280/AA/A	900	340
18	255/55R18		109	Y	XL	BSW	8J	280/AA/A	1030	340
18	225/60R18		100	V		BSW	6 1/2J	280/AA/A	800	300
18	235/60R18		107	W	XL	BSW	7J	280/AA/A	975	340
18	245/60R18		105	V		BSW	7J	280/AA/B	925	300
18	255/60R18		112	V	XL	BSW	7 1/2J	280/AA/B	1120	340
18	265/60R18		110	V		BSW	8J	280/AA/B	1060	300
19	225/45R19		96	W	XL	BSW	7 1/2J	280/AA/A	710	340
19	265/50R19		110	Y	XL	BSW	8 1/2J	280/AA/A	1060	340
19	235/55R19		101	W		BSW	7 1/2J	280/AA/A	825	300
19	245/55R19		103	V		BSW	7 1/2J	280/AA/A	875	300
19	255/55R19		111	Y	XL	BSW	8J	280/AA/A	1090	340
20	275/35R20		102	W	XL	BSW	9 1/2J	280/AA/A	850	340
20	295/35R20		105	Y	XL	BSW	10 1/2J	280/AA/A	925	340
20	255/40R20		101	Y	XL	BSW	9J	280/AA/A	825	340
20	285/40R20		104	Y		BSW	10J	280/AA/A	900	300
20	255/45R20		105	Y	XL	BSW	8 1/2J	280/AA/A	925	340
20	255/50R20		109	Y	XL	BSW	8J	280/AA/A	1030	340
20	265/50R20		111	Y	XL	BSW	8 1/2J	280/AA/A	1090	340
20	285/50R20		116	W	XL	BSW	9J	280/AA/A	1250	340
20	255/55R20		110	Y	XL	BSW	8J	280/AA/A	1060	340
20	275/55R20		117	W	XL	BSW	8 1/2J	280/AA/A	1285	340
20	275/60R20		119	V	XL	BSW	8J	280/AA/B	1360	340
21	275/45R21		110	Y	XL	BSW	9J	280/AA/A	1060	340
22	305/40R22		114	W	XL	BSW	11J	280/AA/A	1180	340
22	285/45R22		114	W	XL	BSW	9 1/2J	280/AA/A	1180	340
22	305/45R22		118	W	XL	BSW	10J	280/AA/A	1320	340



HS02

A UHP sport SUV product with an offset lateral arrangement block pattern and fine groove design that effectively reduce noise and improve driving comfort.



HANDLING DRAINAGE NOISE BRAKING HIGH DURABILITY

PATTERN DESIGN & FEATURES

Product Design	Product Performance



Safety

The wide center rib design offers great traction when accelerating and braking for a safe driving experience.



Wear Resistance

The greater ratio of grooves provide better drainage capabilities for improved handling and grip in wet weather conditions. The tread compound also provides greater wet grip and reduces rolling resistance.



Block Design

An optimized pitch and sipe pattern arrangement effectively reduce noise for a more comfortable ride.



BLACKHAWK TIRE

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
17	255/60R17		106	H		BSW	7 1/2J	500/A/A	950	300
18	235/50R18		97	V		BSW	7 1/2J	280/AA/A	730	300
18	225/60R18		100	V		BSW	6 1/2J	500/A/A	800	300
19	235/50R19		103	W	XL	BSW	7 1/2J	500/A/A	875	340
19	235/55R19		101	W		BSW	7 1/2J	500/A/A	825	300
19	245/55R19		103	V		BSW	7 1/2J	280/AA/A	875	300
22	305/40R22		114	W	XL	BSW	11J	280/AA/A	1180	340
18	235/50RF18		97	V		BSW	7 1/2J	280/A/A	730	300
18	255/55RF18		105	H		BSW	8J	280/A/A	925	300

BLACKHAWK TIRE

HA01

The HA01 is designed to deliver superior traction for SUVs, pickups and vans both off and on road. The HA01 provides exceptional handling and on-and-off-road stability while maintaining a comfortable ride.







RESILIENT CROSS-COUNTRY TRACTION WEAR RESISTANCE

PATTERN DESIGN & FEATURES

Product Design | **Product Performance**



Tread Compound

The tread compound is specially designed to improve grip and handling on wet and dry surfaces, while also improving tread life.



Noise Emission

Unique pattern design enhances driving stability and effectively reduces noise for a greater driving experience.



Sidewall Design

The sidewall is designed to withstand scratches and bumps common in off-road applications.

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
15	LT215/75R15	6PR	100/97	S		OWL	6J		800/730	350
15	LT225/75R15	6PR	102/99	S		OWL	6J		850/775	350
15	LT235/75R15	6PR	104/101	S		OWL	6 1/2J		900/825	350
15	235/75R15		109	S	XL	OWL	6 1/2J	700/A/B	1030	340
15	31×10.50R15LT	6PR	109	S		OWL	8 1/2J		1030	350
16	215/70R16		100	S		OWL	6 1/2J	700/A/B	800	300
16	LT235/70R16	6PR	104/101	T		OWL	7J		900/825	350
16	235/70R16		106	S		OWL	7J	700/A/B	950	300
16	LT245/70R16	6PR	106/103	T		OWL	7J		950/875	350
16	245/70R16		107	S		OWL	7J	700/A/B	975	300
16	255/70R16		111	S		OWL	7 1/2J	700/A/B	1090	300
16	265/70R16		112	S		OWL	8J	700/A/B	1120	300
16	265/70R16		112	T		OWL	8J	700/A/B	1120	300
16	LT265/70R16	8PR	117/114	S		OWL	8J		1285/1180	450
16	LT225/75R16	10PR	115/112	S		OWL	6J		1215/1120	550
16	LT245/75R16	10PR	120/116	Q		OWL	7J		1400/1250	550
16	LT265/75R16	10PR	123/120	Q		OWL	7 1/2J		1550/1400	550
16	LT285/75R16	10PR	126/123	R		OWL	8J		1700/1550	550
16	LT235/85R16	10PR	120/116	S		OWL	6 1/2J		1400/1250	550
17	225/65R17		102	T		OWL	6 1/2J	700/A/B	850	300
17	235/65R17		104	T		OWL	7J	700/A/B	900	300
17	245/65R17		107	S		OWL	7J	700/A/B	975	300
17	LT265/65R17	10PR	120/117	R		OWL	8J		1400/1285	550
17	285/65R17		116	H		OWL	8 1/2J	700/A/B	1250	300
17	245/70R17		110	S		OWL	7J	700/A/B	1060	300
17	LT245/70R17	10PR	119/116	R		OWL	7J		1360/1250	550
17	265/70R17		115	T		OWL	8J	700/A/B	1215	300
17	LT265/70R17	10PR	121/118	Q		OWL	8J		1450/1320	550
17	LT285/70R17	10PR	121/118	S		OWL	8 1/2J		1450/1320	550
17	LT235/80R17	10PR	120/117	R		OWL	6 1/2J		1400/1285	550
18	245/60R18		105	T		OWL	7J	700/A/B	925	300
18	265/60R18		110	T		OWL	8J	700/A/B	1060	300
18	255/65R18		111	S		OWL	7 1/2J	700/A/B	1090	300
18	275/65R18		116	T		OWL	8J	700/A/B	1250	300
18	LT275/65R18	10PR	123/120	S		OWL	8J		1550/1400	550
20	265/50R20		111	T	XL	BSW	8 1/2J	700/A/A	1090	340
20	265/50R20		111	T	XL	OWL	8 1/2J	700/A/A	1090	340
20	275/55R20		117	H	XL	OWL	8 1/2J	700/A/A	1285	340
20	LT275/65R20	10PR	126/123	S		OWL	8J		1700/1550	550



A/T

The A/T is designed to deliver superior traction for SUVs, pickups and vans both off and on road. The A/T provides exceptional handling and on-and-off-road stability while maintaining a comfortable ride.

RESILIENT | CROSS-COUNTRY | TRACTION | WEAR RESISTANCE




PATTERN DESIGN & FEATURES

Product Design | **Product Performance**




Handling and Stability

A wide tread surface maximizes the tire contact area while a square contour tread design evenly distributes pressure to improve handling stability and traction. Large shoulder lugs offer sufficient strength and rigidity to improve handling stability when cornering at high speeds.



Enhanced Traction

Large center lugs improve traction while the staggered shoulder blocks effectively improve traction and grip on snow and mud. The unique upper sidewall lug improves protection and increases traction on loose terrain.



Wet Performance

Tread grooves, blocks, and sipes work in tandem to effectively siphon water and break through water film, thus offering effective performance on wet roads.

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
15	235/75R15		109	S	XL	BSW	6 1/2J	620/A/B	1030	340
15	31×10.50R15LT	6PR	109	S		BSW	8 1/2J		1030	350
16	235/70R16		106	S		BSW	7J	620/A/B	950	300
16	245/75R16		111	S		BSW	7J	620/A/B	1090	300
16	265/70R16		112	T		BSW	8J	620/A/B	1120	300
16	265/75R16		116	S		BSW	7 1/2J	620/A/B	1250	300
16	LT225/75R16	10PR	115/112	S		BSW	6J		1215/1120	550
16	LT235/85R16	10PR	120/116	S		BSW	6 1/2J		1380/1260	550
16	LT245/75R16	10PR	120/116	S		BSW	7J		1380/1260	550
16	LT265/75R16	10PR	123/120	S		BSW	7 1/2J		1550/1400	550
17	235/65R17		104	S		BSW	7J	620/A/B	900	300
17	245/65R17		107	S		BSW	7J	620/A/B	975	300
17	245/70R17		110	T		BSW	7J	620/A/B	1060	300
17	255/65R17		110	T		BSW	7 1/2J	620/A/B	1060	300
17	265/65R17		112	S		BSW	8J	620/A/B	1120	300
17	265/70R17		115	S		BSW	8J	620/A/B	1215	300
17	LT235/80R17	10PR	120/117	R		BSW	6 1/2J		1400/1285	550
17	LT245/70R17	10PR	119/116	S		BSW	7J		1360/1250	550
17	LT245/75R17	10PR	121/118	S		BSW	7J		1450/1320	550
17	LT265/70R17	10PR	123/120	S		BSW	8J		1550/1400	550
17	LT285/70R17	10PR	126/123	S		BSW	8 1/2J		1700/1550	550
17	LT315/70R17	10PR	126/123	S		BSW	9 1/2J		1700/1550	450
17	35×12.50R17LT	10PR	125	R		BSW	10J		1650	450
18	265/65R18		114	T		BSW	8J	620/A/B	1180	300
18	265/70R18		116	T		BSW	8J	620/A/B	1250	300
18	275/65R18		116	T		BSW	8J	620/A/B	1250	300
18	LT265/70R18	10PR	124/121	S		BSW	8J		1600/1450	550
18	LT275/65R18	10PR	123/120	R		BSW	8J		1550/1400	550
18	LT275/70R18	10PR	125/122	R		BSW	8J		1650/1500	550
18	33×12.50R18LT	10PR	118	S		BSW	10J		1320	450
18	35×12.50R18LT	10PR	123	R		BSW	10J		1550	450
20	265/50R20		111	T	XL	BSW	8 1/2J	620/A/B	1090	340
20	275/55R20		117	T	XL	BSW	8 1/2J	620/A/B	1285	340
20	275/55R20		117	T	XL	BSW	8 1/2J	620/A/B	1285	340
20	275/60R20		115	T		BSW	8J	620/A/B	1215	300
20	LT265/60R20	10PR	121/118	R		BSW	8J		1450/1320	550
20	LT275/55R20	10PR	120/117	R		BSW	8 1/2J		1400/1285	550
20	LT275/60R20	10PR	123/120	R		BSW	8J		1550/1400	550
20	LT275/65R20	10PR	126/123	R		BSW	8J		1700/1550	550
20	LT285/60R20	10PR	125/122	R		BSW	8 1/2J		1650/1500	550
20	LT305/55R20	10PR	121/118	R		BSW	9 1/2J		1450/1320	450
20	33×12.50R20LT	10PR	114	S		BSW	10J		1180	450
20	35×12.50R20LT	10PR	121	R		BSW	10J		1450	450
22	285/45R22		114	H	XL	BSW	9 1/2J	620/A/B	1180	340

BLACKHAWK TIRE

HM01

The HM01 is specially designed for cross-country enthusiasts.





OFF ROAD CAPABLE | CROSS-COUNTRY | HIGH DURABILITY | PUNCTURE RESISTANT | RESILIENT

PATTERN DESIGN & FEATURES

Product Design	Product Performance



Strengthened Carcass

The three ply carcass makes this tire extremely strong and capable of handling strong impacts.



Shoulder Blocks

The large shoulder block design vastly enhances the handling performance on muddy and rocky roads.



Sidewall Design

The shield-like design extending up from the sidewall improves traction and further protects the sidewall from damage.



Shoulder Grooves

Wide and deep shoulder grooves effectively eject mud and rocks while also improving grip in rugged terrain.

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
15	LT235/75R15	6PR	104/101	Q		OWL	6 1/2J		900/825	350
15	30×9.50R15LT	6PR	104	Q		OWL	7 1/2J		900	350
15	33×12.50R15LT	6PR	108	Q		OWL	10J		1000	250
15	31×10.50R15LT	6PR	109	Q		OWL	8 1/2J		1030	350
15	35×12.50R15LT	6PR	113	Q		OWL	10J		1150	250
16	LT235/85R16	10PR	120/116	Q		OWL	6 1/2J		1380/1260	550
16	LT245/75R16	10PR	120/116	Q		OWL	7J		1380/1260	550
16	LT255/85R16	10PR	123/120	Q		RWL	7J		1550/1400	550
16	LT265/75R16	10PR	123/120	Q		OWL	7 1/2J		1550/1400	550
16	LT285/75R16	10PR	126/123	Q		RWL	8J		1700/1550	550
17	LT245/70R17	10PR	119/116	Q		RWL	7J		1360/1250	550
17	LT265/65R17	10PR	120/117	Q		OWL	8J		1400/1285	550
17	LT265/70R17	10PR	121/118	Q		OWL	8J		1450/1320	550
17	LT285/70R17	10PR	121/118	Q		OWL	8 1/2J		1450/1320	550
17	33×12.50R17LT	8PR	114	Q		OWL	10J		1180	350
17	35×12.50R17LT	10PR	121	Q		OWL	10J		1450	450
18	33×12.50R18LT	10PR	118	Q		BSW	10J		1320	450
18	35×12.50R18LT	10PR	123	Q		BSW	10J		1550	450
20	LT305/55R20	10PR	121/118	Q		BSW	9 1/2J		1450/1320	450
20	33×12.50R20LT	10PR	114	Q		BSW	10J		1180	450
20	35×12.50R20LT	10PR	121	Q		BSW	10J		1450	450

BLACKHAWK TIRE

HC31

The HC31 is an economic pattern offering a deep tread and improved contour design for overall improved performance and service life.






WEAR RESISTANCE | HANDLING | PUNCTURE RESISTANT | RESILIENT

PATTERN DESIGN & FEATURES

Product Design | **Product Performance**




Overall Performance

The tread is designed to increase ground contact area for improved handling and durability.



Service Life

The optimized tread contour and internal structure design effectively reduce heat buildup to effectively improve service life.



Safety

Tread grooves effectively eject water and reduce stone retention for improved grip, driving comfort, and overall safety.

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
12	155R12C	8PR	88/86	Q		BSW	4.50B		560/530	450
13	155R13C	8PR	90/88	S		BSW	4.50B		600/560	450
13	165R13C	8PR	94/93	S		BSW	4.50B		670/650	450
13	175R13C	8PR	97/95	S		BSW	5.00B		730/690	450
14	165R14C	8PR	96/95	S		BSW	4 1/2J		710/690	450
14	175R14C	8PR	99/97	Q		BSW	5J		775/730	450
14	185R14C	8PR	102/100	Q		BSW	5 1/2J		850/800	450
14	185R14C	8PR	102/100	Q		WR	5 1/2J		850/800	450
14	195R14C	8PR	106/104	Q		BSW	5 1/2J		950/900	450
14	195R14C	8PR	106/104	Q		WR	5 1/2J		950/900	450
15	195R15C	8PR	106/104	R		BSW	5 1/2J		950/900	450
15	195R15C	8PR	106/104	R		WR	5 1/2J		950/900	450
15	205/70R15C	8PR	106/104	R		BSW	6J		950/900	450
15	205/70R15C	8PR	106/104	R		WR	6J		950/900	450






HL03

Specially designed pattern for commercial light trucks, minivans, and minibuses that offers outstanding handling on wet surfaces as well as excellent high speed durability.




PATTERN DESIGN & FEATURES

Product Design | **Product Performance**




Driving Comfort

The tread has a varied pitch design created to reduce noise and allow for a better driving experience.



Tread Pattern

Original pattern design ensures excellent performance and greater driving comfort on wet and dry roads.



Tread Design

Wide and deep grooves increase wear resistance, efficiently drain water, and provide greater handling stability.

SIZES

RIM	SIZE	PR	LI	SS	XL OR NOT	SIDEWALL	STANDARD RIM	UTQG	MAX LOAD (kg)	PRESSURE (kpa)
12	145R12C	8PR	86/84	P		BSW	4.00B		530/500	450
12	155R12C	8PR	88/86	P		BSW	4.50B		560/530	450
13	165/70R13C	6PR	88/86	Q		BSW	5.00B		560/530	375
13	155R13C	6PR	85/83	Q		BSW	4.50B		515/487	350
13	165R13C	8PR	94/93	S		BSW	4.50B		670/650	450
13	175R13C	8PR	97/95	S		BSW	5.00B		730/690	450
14	175/65R14C	6PR	90/88	T		BSW	5J		600/560	375
14	175/70R14C	6PR	95/93	Q		BSW	5J		690/650	375
14	205/75R14C	8PR	109/107	Q		WR	5 1/2J		1030/975	475
14	175R14C	8PR	99/98	Q		BSW	5J		775/750	450
14	185R14C	8PR	102/100	Q		BSW	5 1/2J		850/800	450
14	195R14C	8PR	106/104	Q		BSW	5 1/2J		950/900	450
14	195R14C	8PR	106/104	Q		WR	5 1/2J		950/900	450
14	205R14C	8PR	109/107	R		BSW	6J		1030/975	450
15	205/65R15C	6PR	102/100	R		BSW	6J		850/800	375
15	195/70R15C	8PR	104/102	R		BSW	6J		900/850	450
15	205/70R15C	8PR	106/104	R		BSW	6J		950/900	450
15	205/70R15C	10PR	109/107	R		BSW	6J		1030/975	550
15	215/70R15C	8PR	109/107	S		BSW	6 1/2J		1030/975	450
15	225/70R15C	8PR	112/110	R		BSW	6 1/2J		1120/1060	450
15	185R15C	8PR	103/102	R		BSW	5 1/2J		875/850	450
15	195R15C	8PR	106/104	R		BSW	5 1/2J		950/900	450
15	195R15C	8PR	106/104	R		WR	5 1/2J		950/900	450
15	215R15C	8PR	109/107	R		WR	6J		1030/975	450
16	195/60R16C	6PR	99/97	T		BSW	6J		775/730	375
16	215/60R16C	8PR	108/106	T		BSW	6 1/2J		1000/950	475
16	195/65R16C	8PR	104/102	R		BSW	6J		900/850	475
16	205/65R16C	8PR	107/105	R		BSW	6J		975/925	475
16	215/65R16C	8PR	109/107	R		BSW	6 1/2J		1030/975	475
16	225/65R16C	8PR	112/110	R		BSW	6 1/2J		1120/1060	475
16	235/65R16C	8PR	115/113	R		BSW	7J		1215/1150	475
16	215/70R16C	6PR	108/106	Q		BSW	6 1/2J		1000/950	375
16	185/75R16C	8PR	104/102	R		BSW	5J		900/850	475
16	195/75R16C	8PR	107/105	R		BSW	5 1/2J		975/925	475
16	195/75R16C	10PR	110/108	R		BSW	5 1/2J		1060/1000	525
16	205/75R16C	8PR	110/108	R		BSW	5 1/2J		1060/1000	475
16	205/75R16C	10PR	113/111	R		BSW	5 1/2J		1150/1090	525
16	215/75R16C	10PR	116/114	R		BSW	6J		1250/1180	525
16	225/75R16C	10PR	121/120	R		BSW	6J		1450/1400	575
16	175R16C	8PR	101/99	R		BSW	5J		825/775	450
16	205R16C	8PR	110/108	R		BSW	6J		1060/1000	450
17	225/70R17C	6PR	112/110	R		BSW	6 1/2J		1120/1060	375




Important Tips for Optimal Tire Performance :

1. Maintain optimum air pressure
2. Inspect tread grooves to ensure tires are safe and legal
3. Visually check for tire damage

Ensure you check your tires once a month and before long trips to maintain performance and ensure safety.

Why is it important I have the correct tire pressure?


A tire at optimum air pressure should will ensure more safety, provide greater driving performance, improve tire life and reduce fuel consumption.
Tire air pressure decreases naturally (little by little). It is generally accepted that air pressure in tires on a passenger car decreases by 5–10% (10–20kPa) every month.

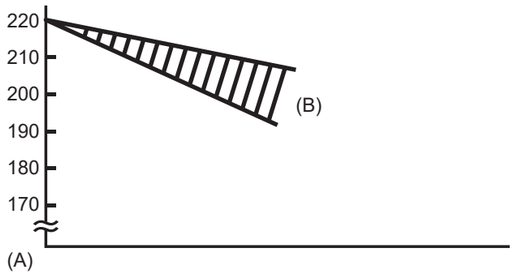

Tire size: 195/65R 15
Starting pressure: 220kPa (100kPa=1.0kgf/cm2)
(A) Air pressure (kPa)
(B) Decreases by 10-20kPa a month

Dangers of Using Worn Tire


Worn tires need a longer stopping distance on wet roads.

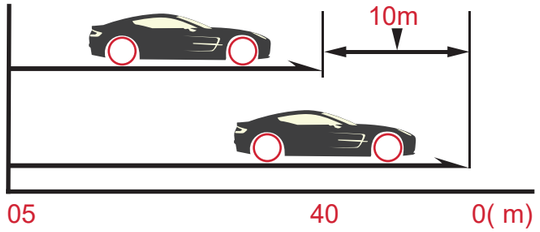

At the same speed (80km/h) and from the same braking point, there is a difference of 10 meters!
(A) New tire
(B) Worn tire (worn out to 1.6mm)

Why is it Important I Check for Tire Wear?

The deeper the groove, which is on the surface of the tire, the more grip a tire will have. As your tread pattern wears over time, the grip will begin to decrease. Never use a tire where even just one tread wear indicator is exposed.

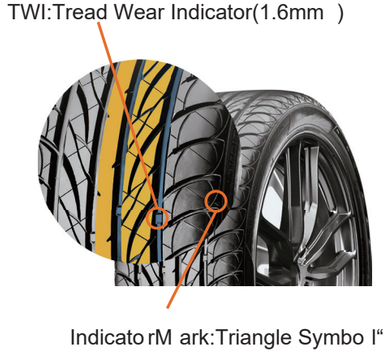


<Tire Tread Wear Indicator >

What are the advantages of tire rotation?

1. Help Prevent Uneven Tread Wear
2. Extension of Tire Service Life (money in your wallet)
3. Averaging of Tire Fatigue

Note: The front-wheel tires of an FF vehicle wear two or three times faster than the rear-wheel tires because the front-wheel tires function for both driving and steering.

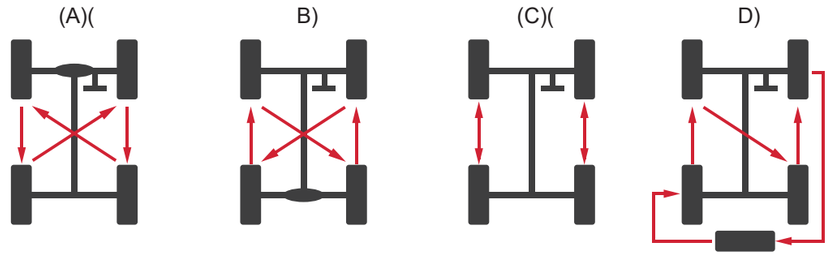

Examples of Tire Rotation

(A) FF Vehicle (B) FR Vehicle (C) Tires with Directional Patterns (D) Spare Tire Included

NOTES

NOTES

NOTES

NOTES

BLACKHAWK

BLACKHAWK Headquarters
No. 43 Zhengzhou Road, Shibei District, Qingdao, China

REV 26.01