



PASSENGER & LIGHT TRUCK

BROCHURE

2024

SUMMER TYRE

05 Ultra High Performance

MK927 05 MK927SP 07 MK937 08 MK921 10



23 Van/Cargo

MK228 23 MK501 24 MK506 25 MK517 26 MK717 27 MK737 28



17 4x4/Off-road

MK818 17 MK828 18 MK829 19 MK868 20 MK869 21 MK878 22 MK877 23



WINTER TYRE

30 HP/UHP

MK617 30 MK687 31



32 SUV

MK617 SUV 32



33 VAN

MK627 33



34 Studdable

MK677 34



CONTENTS

01 Economy

MK667 01 MK668 03 EX-COMFORT 04



12 EV

MK302 12 MK307 13 MK317 14



11 SUV

MK837 11



22 Special

MK665 22



PATTERN GUIDE SUMMER TYRE

ULTRA HIGH PERFORMANCE

ECONOMY

VAN/CARGO

EV

4X4 /OFF -ROAD

SUV

SPECIAL



MK667

mileking HP
ECONOMY



- Three broad longitudinal straight groove design offers tyres optimum wet grip and water dispersion.
- The straight main groove matching whole block design effectively reduces rolling resistance and noise. Arc sipes and segmentation pattern design improving tyres grip ability and the safety on driving.

	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch		
12	145/70R12	-	69	Q	4.50B	150 / 5.9	509 / 20.0	325	300
12	145/70R12	-	69	S	4.50B	150 / 5.9	509 / 20.0	325	300
12	155/70R12	-	73	T	4.50B	157 / 6.2	523 / 20.6	365	300
12	165/70R12	-	77	T	5.00B	177 / 7.0	537 / 21.1	412	300
13	155/65R13	-	73	Q	4.50B	157 / 6.2	532 / 20.9	365	300
13	155/70R13	-	75	T	4.50B	157 / 6.2	548 / 21.6	387	300

	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch		
13	165/65R13	-	77	T	5.00B	170 / 6.7	544 / 21.4	412	300
13	165/70R13	-	79	S	5.00B	170 / 6.7	562 / 22.1	437	300
13	175/60R13	-	77	H	5.00B	177 / 7.0	540 / 21.3	412	300
13	175/70R13	-	82	S	5.00B	177 / 7.0	576 / 22.7	475	300
13	185/70R13	-	86	T	5.50B	189 / 7.4	590 / 23.2	530	300
14	155/65R14	-	75	H	41/2J	157 / 6.2	558 / 22.0	387	300
14	165/60R14	-	75	T	5J	170 / 6.7	554 / 21.8	387	300
14	165/65R14	-	79	H	5J	170 / 6.7	570 / 22.4	437	300
14	175/65R14	-	82	T	5J	177 / 7.0	584 / 23.0	475	300
14	185/60R14	-	82	H	51/2J	189 / 7.4	578 / 22.8	475	300
14	185/65R14	-	86	T	51/2J	189 / 7.4	596 / 23.5	530	300
14	185/65R14	-	90XL	S	51/2J	189 / 7.4	596 / 23.5	600	300
14	185/70R14	-	88	T	51/2J	189 / 7.4	616 / 24.3	560	300
14	195/70R14	-	95XL	H	6J	201 / 7.9	630 / 24.8	690	340
14	205/60R14	-	88	H	6J	209 / 8.2	602 / 23.7	560	300
14	215/70R14	-	96	H	61/2J	221 / 8.7	658 / 25.9	710	300
15	185/55R15	-	82	V	6J	194 / 7.6	585 / 23.0	475	300
15	185/60R15	-	88XL	H	51/2J	189 / 7.4	603 / 23.7	560	340
15	185/65R15	-	88	H	51/2J	189 / 7.4	621 / 24.4	560	300
15	185/65R15(2 layers)	-	88	H	51/2J	189 / 7.4	621 / 24.4	560	300
15	185/65R15	-	92	H	51/2J	189 / 7.4	621 / 24.4	630	340
15	185/65R15LT	12PR	103/100	Q	51/2J	189 / 7.4	621 / 24.4	875/800	650
15	185/65R15LT	8PR	94/91	R	51/2J	189 / 7.4	621 / 24.4	670/615	450
15	185/65R15LT	10PR	99/96	Q	51/2J	189 / 7.4	621 / 24.4	775/710	550
15	195/50R15	-	82	V	6J	201 / 7.9	577 / 22.7	475	300
15	195/55R15	-	85	H	6J	201 / 7.9	595 / 23.4	515	300
15	195/60R15	-	88	H	6J	201 / 7.9	615 / 24.2	560	300
15	195/60R15(2 layers)	-	88	H	6J	201 / 7.9	615 / 24.2	560	300
15	195/65R15	-	91	H	6J	201 / 7.9	635 / 25.0	615	300
15	205/60R15	-	91	H	6J	209 / 8.2	627 / 24.7	615	300
15	205/65R15	-	94	H	6J	209 / 8.2	647 / 25.5	670	300
16	T125/80R16	-	97	M	4T	131 / 5.2	606 / 23.9	730	420
16	T125/90R16	-	98	M	4T	131 / 5.2	632 / 24.9	750	420
16	T155/90R16	-	110	M	4T	152 / 6.0	686 / 27.0	1060	420
16	195/60R16	-	93XL	H	6J	201 / 7.9	640 / 25.2	650	340
16	195/60R16(2 layers)	-	93XL	H	6J	201 / 7.9	640 / 25.2	650	340
16	195/60R16C	6PR	99/97	Q	6J	201 / 7.9	640 / 25.2	775/730	375
16	205/55R16	-	91	V	61/2J	214 / 8.4	632 / 24.9	615	300
17	T125/80R17	-	99	M	4T	131 / 5.2	632 / 24.9	775	420
17	T135/90R17	-	104	M	4T	138 / 5.4	676 / 26.6	900	420
17	T155/80R17	-	111	M	4T	152 / 6.0	680 / 26.8	1090	420
17	T155/90R17	-	112	M	4T	152 / 6.0	712 / 28.0	1120	420
17	T165/80R17	-	115	M	4T	159 / 6.3	696 / 27.4	1215	420
18	T135/80R18	-	104	M	4T	138 / 5.4	673 / 26.5	900	420
18	T145/80R18	-	109	M	4T	145 / 5.7	689 / 27.1	1030	420

MK668

HP

ECONOMY

- New formula reduces 30%-40% of rolling resistance to save fuel consumption and wide tread increases footprint to offer wear-resisting performance.
- High ratio straight main sipes design effectively reduces rolling resistance and noise to protect environment
- Pitching sequence shoulder blocks offers outstanding handling. Perfect distribution of lug type enhances traction on wet roads.



EX-COMFORT

HP

ECONOMY

- The design effectively prevents the tyre from slipping.
- Good gripping on the wet roads
- High durability
- More fuel efficiency, less noise and comfortable driving experience are achieved by using environment-friendly materials such as silicon etc



	SIZE	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
				(mm)/inch	(mm)/inch	Single/Dual		
15	195/55R15	85	V	6J	201 / 7.9	595 / 23.4	515	300
15	195/60R15	88	H	6J	201 / 7.9	615 / 24.2	560	300
15	195/60R15LT	95/91	R	6J	201 / 7.9	615 / 24.2	690/615	450
15	195/65R15	91	H	6J	201 / 7.9	635 / 25.0	615	300
15	195/70R15	92	S	6J	201 / 7.9	655 / 25.8	630	300
15	195/70R15LT-8PR	104/102	S	6J	201 / 7.9	655 / 25.8	900/850	450
15	205/60R15	91	V	6J	209 / 8.2	627 / 24.7	615	300
15	205/65R15	94	H	6J	209 / 8.2	647 / 25.5	670	300
15	205/65R15	99XL	H	6J	209 / 8.2	647 / 25.5	775	340
15	205/70R15	96	H	6J	209 / 8.2	669 / 26.3	710	300
15	215/70R15	98	T	6 1/2J	221 / 8.7	683 / 26.9	750	300
15	225/75R15	102	S	6J	223 / 8.8	719 / 28.3	850	300
16	195/50R16	84	V	6J	201 / 7.9	602 / 23.7	500	300
16	195/55R16	91XL	H	6J	201 / 7.9	620 / 24.4	615	340
16	195/60R16	89	H	6J	201 / 7.9	640 / 25.2	580	300
16	205/50R16	91XL	V	6 1/2J	214 / 8.4	312 / 12.3	615	340
16	205/55R16	91	V	6 1/2J	214 / 8.4	632 / 24.9	615	300
16	205/60R16	92	H	6J	209 / 8.2	652 / 25.7	630	300
16	205/65R16	95	H	6J	209 / 8.2	672 / 26.5	690	300
16	215/55R16	93	V	7J	226 / 8.9	642 / 25.3	650	300
16	215/60R16	99XL	H	6 1/2J	221 / 8.7	664 / 26.1	775	340
16	215/65R16	98	H	6 1/2J	221 / 8.7	686 / 27.0	750	300
16	225/55R16	99XL	V	7J	233 / 9.2	654 / 25.7	775	340
16	225/60R16	98	H	6 1/2J	228 / 9.0	676 / 26.6	750	300
17	205/55R17	91	H	6 1/2J	214 / 8.4	658 / 25.9	615	300
17	215/50R17	95XL	V	7J	226 / 8.9	648 / 25.5	690	340
17	215/55R17	94	V	7J	226 / 8.9	668 / 26.3	670	300
17	215/60R17	96	H	6 1/2J	221 / 8.7	690 / 27.2	710	300
17	215/65R17	99	V	6 1/2J	221 / 8.7	712 / 28.0	775	300
17	225/55R17	97	V	7J	233 / 9.2	680 / 26.8	730	300
17	225/60R17	99	H	6 1/2J	228 / 9.0	702 / 27.6	775	300
17	225/65R17	102	H	6 1/2J	221 / 8.7	724 / 28.5	850	300
18	225/60R18	100	V	6 1/2J	228 / 9.0	727 / 28.6	800	300
18	235/50R18	101XL	V	7 1/2J	245 / 9.6	693 / 27.3	825	340

	SIZE	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
				(mm)/inch	(mm)/inch	Single/Dual		
13	175/70R13	82	T	5.00B	177 / 7.0	576 / 22.7	475	-
14	175/70R14	88	T	5J	177 / 7.0	602 / 23.7	560	-
14	175/65R14	82	H	5J	177 / 7.0	584 / 23.0	475	-
14	185/65R14	86	H	5.5J	189 / 7.4	596 / 23.5	530	-
14	185/70R14	88	H	5.5J	189 / 7.4	616 / 24.3	560	-
15	185/60R15	88	H	5.5J	189 / 7.4	603 / 23.7	560	-
15	185/65R15	88	H	5.5J	189 / 7.4	621 / 24.4	560	-
15	195/50R15	82	V	6J	201 / 7.9	577 / 22.7	475	-
15	195/55R15	85	V	6J	201 / 7.9	595 / 23.4	515	-
15	195/60R15	88	V	6J	201 / 7.9	615 / 24.2	560	-
15	195/65R15	91	V	6J	201 / 7.9	635 / 25.0	615	-
15	205/65R15	94	H	6J	209 / 8.2	647 / 25.5	670	-
16	205/55R16	91	V	6.5J	214 / 8.4	632 / 24.9	615	-
16	205/60R16	92	V	6J	209 / 8.2	652 / 25.7	630	-
16	215/55ZR16	97	W	7J	226 / 8.9	642 / 25.3	730	-
16	215/60R16	95	H	6.5J	221 / 8.7	664 / 26.1	690	-
17	205/45ZR17	88	W	7J	206 / 8.1	616 / 24.3	560	-
17	215/45ZR17	91	W	7J	213 / 8.4	626 / 24.6	615	-
17	215/50ZR17	95	W	7J	226 / 8.9	648 / 25.5	690	-
17	215/55ZR17	98	W	7J	226 / 8.9	668 / 26.3	750	-
17	225/45ZR17	94	W	7.5J	225 / 8.9	634 / 25.0	670	-
17	225/50ZR17	98	W	7J	233 / 9.2	658 / 25.9	750	-
18	225/40ZR18	92	W	8J	230 / 9.1	637 / 25.1	630	-

MK927

ileking

UHP


ULTRA HIGH PERFORMANCE

- Strong and sequential blocks design improve wet grip and braking performance.
- Wide rib grooves effectively removes water provides shorter brakingdistances and safer handling on wet roads.
- Racing compound technology provides superior grip performance on wet road surfaces.



	SIZE	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
					(mm)/inch	(mm)/inch		
16	205/45ZR16	87XL	W	7J	206 / 8.1	590 / 23.2	545	340
16	225/50R16	96XL	V	7J	233 / 9.2	632 / 24.9	710	340
17	205/50ZR17	93XL	W	6 1/2J	214 / 8.4	638 / 25.1	650	340
17	215/40ZR17	87XL	W	7 1/2J	218 / 8.6	604 / 23.8	545	340
17	215/45ZR17	91XL	W	7J	213 / 8.4	626 / 24.6	615	340
17	215/50ZR17	95XL	W	7J	226 / 8.9	648 / 25.5	690	340
17	225/45ZR17	94XL	W	7 1/2J	225 / 8.9	634 / 25.0	670	350
17	225/50ZR17	98XL	W	7J	233 / 9.2	658 / 25.9	750	340
17	235/45ZR17	97XL	W	8J	236 / 9.3	644 / 25.4	730	340
17	235/50R17	100XL	V	7 1/2J	245 / 9.6	668 / 26.3	800	340
17	235/55R17	103XL	V	7 1/2J	245 / 9.6	690 / 27.2	875	340
17	245/45ZR17	99XL	W	8J	243 / 9.6	652 / 25.7	775	340
18	215/40ZR18	89XL	W	7 1/2J	218 / 8.6	629 / 24.8	580	340
18	215/45ZR18	93XL	W	7J	213 / 8.4	651 / 25.6	650	340
18	215/55R18	99XL	V	7J	226 / 8.9	693 / 27.3	775	340
18	225/40ZR18	92XL	W	8J	230 / 9.1	637 / 25.1	630	350
18	225/45ZR18	95XL	W	7 1/2J	225 / 8.9	659 / 25.9	690	350
18	225/50R18	99XL	V	7J	233 / 9.2	683 / 26.9	775	340
18	235/40ZR18	95XL	W	8 1/2J	241 / 9.5	645 / 25.4	690	350
18	235/45ZR18	98XL	W	8J	236 / 9.3	669 / 26.3	750	340
18	235/50ZR18	101XL	W	7 1/2J	245 / 9.6	693 / 27.3	825	340
18	235/55R18	104XL	V	7 1/2J	245 / 9.6	715 / 28.1	900	340
18	235/60R18	103	V	7J	240 / 9.4	739 / 29.1	875	300

	SIZE	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
					(mm)/inch	(mm)/inch	Single/Dual	
18	245/40ZR18	97XL	W	8 1/2J	248 / 9.8	653 / 25.7	730	340
18	245/45ZR18	100XL	W	8J	243 / 9.6	677 / 26.7	800	340
18	255/35ZR18	94XL	W	9J	260 / 10.2	635 / 25.0	670	340
18	255/50R18	106XL	V	8J	265 / 10.4	713 / 28.1	950	340
18	255/55R18	109XL	V	8J	265 / 10.4	737 / 29.0	1030	340
18	265/35ZR18	97XL	W	9 1/2J	271 / 10.7	643 / 25.3	730	340
18	265/60R18	110	H	8J	272 / 10.7	775 / 30.5	1060	300
19	215/35ZR19	85XL	W	7 1/2J	218 / 8.6	633 / 24.9	515	340
19	225/35ZR19	88XL	W	8J	230 / 9.1	641 / 25.2	560	340
19	225/40ZR19	93XL	W	8J	230 / 9.1	663 / 26.1	650	340
19	235/35ZR19	91XL	W	8 1/2J	241 / 9.5	647 / 25.5	615	340
19	235/50R19	103XL	V	7 1/2J	245 / 9.6	719 / 28.3	875	340
19	235/55R19	105XL	V	7 1/2J	245 / 9.6	741 / 29.2	925	340
19	245/35ZR19	93XL	W	8 1/2J	248 / 9.8	655 / 25.8	650	350
19	245/40ZR19	98XL	W	8 1/2J	248 / 9.8	679 / 26.7	750	340
19	245/50R19	105XL	V	7 1/2J	253 / 10.0	729 / 28.7	925	340
19	255/55R19	111XL	V	8J	265 / 10.4	763 / 30.0	1090	340
19	265/30ZR19	93XL	W	9 1/2J	271 / 10.7	643 / 25.3	650	340
19	275/40ZR19	105XL	W	9 1/2J	278 / 10.9	703 / 27.7	925	340
20	225/35ZR20	93XL	W	8J	230 / 9.1	666 / 26.2	650	350
20	235/30ZR20	88XL	W	8 1/2J	242 / 9.5	650 / 25.6	560	340
20	245/30ZR20	90XL	W	8 1/2J	248 / 9.8	656 / 25.8	600	340
20	245/35ZR20	95XL	W	8 1/2J	248 / 9.8	680 / 26.8	690	350
20	245/40ZR20	99XL	W	8 1/2J	248 / 9.8	704 / 27.7	775	340
20	255/35ZR20	97XL	Y	9J	260 / 10.2	686 / 27.0	730	350
20	255/35ZR20	102XL	Y	9J	260 / 10.2	686 / 27.0	850	350
20	265/50ZR20	111XL	W	8 1/2J	277 / 10.9	774 / 30.5	1090	340
20	315/35ZR20	110XL	W	11J	320 / 12.6	728 / 28.7	1060	340
21	265/40ZR21	105XL	W	9 1/2J	271 / 10.7	745 / 29.3	925	340
21	265/45ZR21	104	W	9J	266 / 10.5	771 / 30.4	900	300
21	295/35ZR21	107XL	W	10 1/2J	301 / 11.9	739 / 29.1	975	340
22	265/35ZR22	102XL	W	9 1/2J	271 / 10.7	745 / 29.3	850	350
22	275/40ZR22	107XL	W	9 1/2J	278 / 10.9	779 / 30.7	975	340
22	285/35ZR22	106XL	W	10J	290 / 11.4	759 / 29.9	950	340
22	285/45R22	114XL	V	9 1/2J	285 / 11.2	815 / 32.1	1180	340
24	295/30R24	105XL	V	10 1/2J	301 / 11.9	788 / 31.0	925	340
26	255/30ZR26	99XL	W	9J	260 / 10.2	814 / 32.0	775	340
26	275/25ZR26	98XL	W	10J	283 / 11.1	798 / 31.4	750	340
26	295/30ZR26	107XL	W	10 1/2J	301 / 11.9	838 / 33.0	975	340

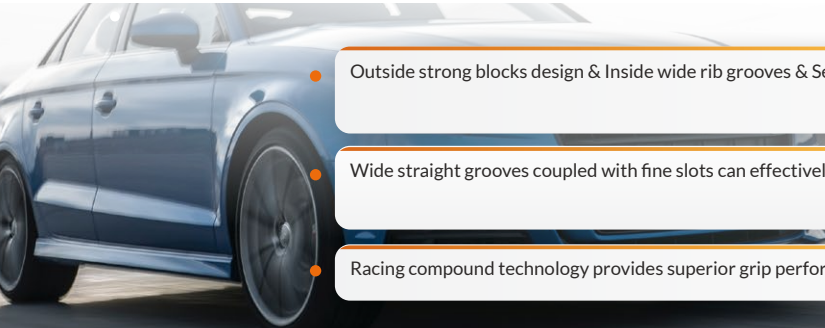

MK9275P



UHP

ULTRA HIGH PERFORMANCE



- Outside strong blocks design & Inside wide rib grooves & Sequential blocksdesign
- Wide straight grooves coupled with fine slots can effectively drain the water shorten the braking distance
- Racing compound technology provides superior grip performance on wet road surfaces.

	SIZE	Load Index	Speed	Standard Rim	Section Width (mm)/inch	Overall Diameter (mm)/inch	Loading Capacity Single/Dual	Pressure
17	235/40ZR17	94XL	W	8 1/2J	241 / 9.5	620 / 24.4	670	340
17	245/40ZR17	95XL	W	8 1/2J	248 / 9.8	628 / 24.7	690	340
19	255/35ZR19	96XL	W	9J	260 / 10.2	661 / 26.0	710	340
19	275/30ZR19	96XL	W	9 1/2J	278 / 10.9	649 / 25.6	710	340
19	275/35ZR19	100XL	W	9 1/2J	278 / 10.9	675 / 26.6	800	340
20	245/45ZR20	103XL	W	8J	243 / 9.6	728 / 28.7	875	340
20	275/30ZR20	97XL	W	9 1/2J	278 / 10.9	674 / 26.5	730	340
20	275/35ZR20	102XL	W	9 1/2J	278 / 10.9	700 / 27.6	850	340
20	275/40ZR20	106XL	W	9 1/2J	278 / 10.9	728 / 28.7	950	340
20	285/30ZR20	99XL	W	10J	290 / 11.4	680 / 26.8	775	340



MK937



UHP

ULTRA HIGH PERFORMANCE



- The water modules with 3D drifting simulation design provides better braking performance on wet/slippery road.
- The straight slots and blocks reduce the noise and improve the grip when making a turn.
- The strengthening rib on tyre shoulder increases the rigidity of the pattern blocks, ensures better steerability.

	SIZE	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
					(mm)/inch	(mm)/inch		
16	205/55R16	91	V	6 1/2J	214 / 8.4	632 / 24.9	615	300
16	205/60R16	92	H	6J	209 / 8.2	652 / 25.7	630	300
16	205/65R16	95	H	6J	209 / 8.2	672 / 26.5	690	300
16	215/45R16	90XL	V	7J	213 / 8.4	600 / 23.6	600	340
16	215/65R16	98	H	6 1/2J	221 / 8.7	686 / 27.0	750	300
17	215/40ZR17	87XL	W	7 1/2J	218 / 8.6	604 / 23.8	545	340
17	215/55R17	98XL	V	7J	226 / 8.9	668 / 26.3	750	340
17	215/60R17	96	H	6 1/2J	221 / 8.7	690 / 27.2	710	300
17	225/50ZR17	98XL	W	7J	233 / 9.2	658 / 25.9	750	340
17	225/60R17	99	H	6 1/2J	228 / 9.0	702 / 27.6	775	300
17	225/65R17	102	H	6 1/2J	228 / 9.0	724 / 28.5	850	300
18	215/50R18	92	V	7J	226 / 8.9	673 / 26.5	630	300
18	215/55R18	99XL	V	7J	226 / 8.9	693 / 27.3	775	340
18	225/50ZR18	99XL	W	7J	233 / 9.2	683 / 26.9	775	340
18	225/55R18	98	V	7J	233 / 9.2	705 / 27.8	750	300
18	225/55R18	102XL	V	7J	233 / 9.2	705 / 27.8	850	340
18	225/60R18	100	V	6 1/2J	228 / 9.0	727 / 28.6	800	300
18	235/45ZR18	98XL	W	8J	236 / 9.3	669 / 26.3	750	340
18	235/50R18	101XL	V	7 1/2J	245 / 9.6	693 / 27.3	825	340
19	225/45R19	96XL	W	7 1/2J	225 / 8.9	685 / 27.0	710	340
19	225/55R19	99	V	7J	233 / 9.2	731 / 28.8	775	300
19	235/40R19	96XL	W	8 1/2J	241 / 9.5	671 / 26.4	710	340
19	235/50R19	99	V	7 1/2J	245 / 9.6	719 / 28.3	775	300
19	235/50R19	103XL	V	7 1/2J	245 / 9.6	719 / 28.3	875	340
19	235/60R19	107XL	H	7J	240 / 9.4	765 / 30.1	975	340
19	245/45R19	102XL	V	8J	243 / 9.6	703 / 27.7	850	340
19	245/55R19	107XL	V	7 1/2J	253 / 10.0	753 / 29.6	975	340
19	255/50R19	107XL	V	8J	265 / 10.4	739 / 29.1	975	340
20	235/30ZR20	88XL	W	8 1/2J	242 / 9.5	650 / 25.6	560	340
20	235/45R20	100XL	W	8J	236 / 9.3	720 / 28.3	800	340
20	245/30ZR20	90XL	W	8 1/2J	248 / 9.8	656 / 25.8	600	340
20	245/45ZR20	103XL	W	8J	243 / 9.6	728 / 28.7	875	340
20	245/50R20	102	V	7 1/2J	253 / 10.0	754 / 29.7	850	300
20	255/45ZR20	105XL	W	8 1/2J	255 / 10.0	738 / 29.1	925	340
20	255/55R20	110XL	V	8J	265 / 10.4	788 / 31.0	1060	340
20	275/45R20	110XL	W	9J	273 / 10.7	756 / 29.8	1060	340
21	255/45R21	105XL	W	8 1/2J	255 / 10.0	763 / 30.0	925	340
22	265/45R22	109XL	W	9J	266 / 10.5	797 / 31.4	1030	340
23	275/35ZR23	104 XL	W	9 1/2J	278 / 10.9	776 / 30.6	900	340
23	285/40ZR23	111 XL	W	10J	290 / 11.4	812 / 32.0	1090	340
23	315/30ZR23	108 XL	W	11J	320 / 12.6	774 / 30.5	1000	340
23	325/35ZR23	111	W	11 1/2J	331 / 13.0	812 / 32.0	1090	300
26	305/30R26	109XL	W	11J	313 / 12.3	844 / 33.2	1030	340
28	275/25R28	100XL	W	10J	283 / 11.1	849 / 33.4	800	340
28	295/25R28	103XL	W	10 1/2J	301 / 11.9	859 / 33.8	875	340
30	255/30R30	102XL	W	9J	260 / 10.2	916 / 36.1	850	340
30	265/30R30	105XL	W	9 1/2J	271 / 10.7	922 / 36.3	925	340
30	275/25R30	101XL	W	10J	283 / 11.1	900 / 35.4	825	340

MK921

UHP

ULTRA HIGH PERFORMANCE

Four longitudinal transverse grooves and radial sipes guarantee the optimum water dispersion on both sides and minimum rolling resistance.

Extra long tread grooves and fuzzy pattern guarantee lower road noise level and tranquil ride also the maximum grip.

Strong rim-protecting ring to avoid impact for safe driving at high speed.



	SIZE	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
					(mm)/inch	(mm)/inch		
16	205/50R16	91XL	V	6 1/2J	214 / 8.4	612 / 24.1	615	320
16	215/55R16	97XL	V	7J	226 / 8.9	642 / 25.3	730	280
17	205/40ZR17	84XL	W	7 1/2J	212 / 8.3	596 / 23.5	500	350
17	205/45R17	88XL	H	7J	206 / 8.1	616 / 24.3	560	340
17	205/50ZR17	93XL	W	6 1/2J	214 / 8.4	638 / 25.1	650	350
18	215/35ZR18	84XL	W	7 1/2J	218 / 8.6	607 / 23.9	500	350
20	225/30ZR20	85XL	W	8J	230 / 9.1	644 / 25.4	515	350
20	245/45ZR20	103XL	W	8J	243 / 9.6	728 / 28.7	875	340
20	275/40ZR20	106XL	W	9 1/2J	278 / 10.9	728 / 28.7	950	350
20	275/45ZR20	110XL	W	9J	273 / 10.7	756 / 29.8	1060	350
20	275/55ZR20	117XL	V	8 1/2J	284 / 11.2	810 / 31.9	1285	340
22	225/30ZR22	87XL	W	8J	230 / 9.1	695 / 27.4	545	340
22	235/30ZR22	90XL	W	8 1/2J	241 / 9.5	701 / 27.6	600	340
22	265/30ZR22	97XL	W	9 1/2J	271 / 10.7	719 / 28.3	730	340
22	265/40ZR22	106XL	W	9 1/2J	271 / 10.7	771 / 30.4	950	340
22	295/25ZR22	97XL	W	10 1/2J	301 / 11.9	707 / 27.8	730	340
24	245/30ZR24	94XL	W	8 1/2J	248 / 9.8	758 / 29.8	670	340
24	275/25ZR24	96XL	W	10J	283 / 11.1	748 / 29.4	710	340

MK837

HT

SUV

- Four broad longitudinal straight grooves offers excellent performance on wet roads and stable steering performance.
- The wide pattern block and transverse oblique grooves ensures fuel-efficient, environmental and safety on driving.
- The new outline and pitch design, as if across in a comfortable and tranquil city.

	SIZE	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
					(mm)/inch	(mm)/inch		
15	235/75R15	105	T	6 1/2J	235 / 9.3	733 / 28.9	925	300
15	255/70R15	108	T	7 1/2J	260 / 10.2	739 / 29.1	1000	300
15	265/70R15	112	T	8J	272 / 10.7	753 / 29.6	1120	300
16	215/70R16	100	T	6 1/2J	221 / 8.7	708 / 27.9	800	300
16	225/70R16	103	T	6 1/2J	228 / 9.0	722 / 28.4	875	300
16	235/60R16	100	H	7J	240 / 9.4	688 / 27.1	800	300
16	235/70R16	106	T	7J	240 / 9.4	736 / 29.0	950	300
16	P245/70R16	107	T	7J	248 / 9.8	750 / 29.5	975	300
16	255/70R16	111	T	7 1/2J	260 / 10.2	764 / 30.1	1090	300
16	265/70R16	112	T	8J	272 / 10.7	778 / 30.6	1120	300
16	275/70R16	114	T	8J	279 / 11.0	792 / 31.2	1180	300
17	215/50R17	95XL	W	7J	226 / 8.9	648 / 25.5	690	340
17	215/60R17	96	H	6 1/2J	221 / 8.7	690 / 27.2	710	300
17	215/65R17	99	H	6 1/2 J	221 / 8.7	712 / 28.0	775	300
17	225/65R17	102	H	6 1/2J	228 / 9.0	724 / 28.5	850	300
17	235/65R17	104	H	7J	240 / 9.4	738 / 29.1	900	300
17	245/65R17	107	T	7J	248 / 9.8	750 / 29.5	975	300
17	265/65R17	112	T	8J	272 / 10.7	776 / 30.6	1120	300
17	265/70R17	115	T	8J	272 / 10.7	804 / 31.7	1215	300
18	215/55R18	99XL	V	7J	226 / 8.9	693 / 27.3	775	340
18	225/55R18	98	V	7J	233 / 9.2	703 / 27.7	750	300
18	235/50R18	101XL	V	7 1/2 J	245 / 9.6	693 / 27.3	825	340
18	235/55R18	104XL	V	7 1/2 J	245 / 9.6	715 / 28.1	900	340
18	245/60R18	105	H	7J	248 / 9.8	751 / 29.6	925	300
18	255/70R18	113	T	7 1/2 J	260 / 10.2	815 / 32.1	1150	300
18	265/60R18	114	H	8J	272 / 10.7	775 / 30.5	1180	340
18	265/70R18	116	T	8J	272 / 10.7	829 / 32.6	1250	300
20	275/55R20	117XL	H	8 1/2J	284 / 11.2	810 / 31.9	1285	340

MK302

EV

ELECTRIC VEHICLES TYRES

- Wide drainage grooves prevent side sliding, enhance wetland performance, and boost security.
- Asymmetrical pattern design improves acceleration and steering response.
- Computer-optimized five-channel pattern reduces noise, enhances comfort during travel.
- 3D slot chamfer enhances braking, traction, heat dissipation, and tire endurance.

	SIZE	PR	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
					(mm)/inch	(mm)/inch		
12	135/70R12	65	Q	4.00B	138 / 5.4	495 / 19.5	290	300
12	145/70R12	69	Q	4.50B	150 / 5.9	509 / 20.0	325	300
12	155/70R12	73	Q	4.50B	157 / 6.2	523 / 20.6	365	300
12	165/55R12	68	R	5.00B	170 / 6.7	487 / 19.2	315	300
13	145/60R13	66	S	4.50B	150 / 5.9	504 / 19.8	300	300
13	155/65R13	73	Q	4.50B	157 / 6.2	532 / 20.9	365	300
13	165/55R13	70	S	5.00B	170 / 6.7	512 / 20.2	335	300
13	165/70R13	79	S	5.00B	170 / 6.7	562 / 22.1	487	300
14	155/50R14	67	S	5J	162 / 6.4	512 / 20.2	307	300
14	155/65R14	75	T	4 1/2J	157 / 6.2	558 / 22.0	387	300
14	165/65R14	79	T	5J	170 / 6.7	570 / 22.4	437	300
14	165/70R14	81	T	5J	170 / 6.7	588 / 23.1	462	300
15	155/60R15	74	T	4 1/2J	157 / 6.2	567 / 22.3	375	300
15	165/60R15	81	H	5 J	170 / 6.7	579 / 22.8	462	340
15	165/65R15	81	H	5J	170 / 6.7	595 / 23.4	462	300
15	175/55R15	77	H	5 1/2J	182 / 7.2	573 / 22.6	412	300
15	175/60R15	81	H	5J	177 / 7.0	591 / 23.3	462	300

MK307

EV

ELECTRIC VEHICLES TYRES

- Wide drainage grooves and transverse design ensure strong wetland performance, prevent sideslip.
- Strong shoulder block with curved grooves destroys water film, improves wet grip.
- Asymmetrical design enhances accurate control for improved handling.
- Eco-friendly materials and optimized tread save fuel, reduce noise, and boost comfort.



MK317

EV

ELECTRIC VEHICLES TYRES

- Wide drainage grooves and transverse design ensure strong wetland performance, prevent sideslip.
- Strong shoulder block with curved grooves destroys water film, improves wet grip.
- Asymmetrical design enhances accurate control for improved handling.
- Eco-friendly materials and optimized tread save fuel, reduce noise, and boost comfort.



	SIZE	PR	Speed	Standard Rim	Section Width (mm)/inch	Overall Diameter (mm)/inch	Loading Capacity Single/Dual	Pressure
17	215/55R17	98XL	V	7J	226 / 8.9	668 / 26.3	750	340
18	215/50ZR18	96XL	W	7J	226 / 8.9	673 / 26.5	710	340
18	225/60R18	104XL	V	61/2J	228 / 9.0	727 / 28.6	900	340
19	235/50R19	99	V	71/2J	245 / 9.6	719 / 28.3	775	300
19	245/45ZR19	102XL	W	8J	243 / 9.6	703 / 27.7	850	340
19	255/55R19	111XL	V	8J	265 / 10.4	763 / 30.0	1090	340
20	245/45R20	103XL	V	8J	243 / 9.6	728 / 28.7	875	340
20	255/50R20	109XL	V	8J	265 / 10.4	764 / 30.1	1030	340
21	265/45ZR21	108XL	W	9J	266 / 10.5	771 / 30.4	1000	340

	SIZE	PR	Speed	Standard Rim	Section Width (mm)/inch	Overall Diameter (mm)/inch	Loading Capacity Single/Dual	Pressure
17	215/55R17	98XL	V	7J	226 / 8.9	668 / 26.3	750	340
18	215/50ZR18	96XL	W	7J	226 / 8.9	673 / 26.5	710	340
18	225/60R18	104XL	V	61/2J	228 / 9.0	727 / 28.6	900	340
19	235/50R19	99	V	71/2J	245 / 9.6	719 / 28.3	775	300
19	245/45ZR19	102XL	W	8J	243 / 9.6	703 / 27.7	850	340
19	255/55R19	111XL	V	8J	265 / 10.4	763 / 30.0	1090	340
20	245/45R20	103XL	V	8J	243 / 9.6	728 / 28.7	875	340
20	255/50R20	109XL	V	8J	265 / 10.4	764 / 30.1	1030	340
21	265/45ZR21	108XL	W	9J	266 / 10.5	771 / 30.4	1000	340

MK818

ieking

AT

4X4/OFF ROAD

- The overall coupling design of irregular pattern block provides stronger traction ability and grip performance
- Outstanding performance with high-strength steel cord and cap ply.
- Tranquility with fuzzy arrangement of pattern block without specified peak and with variable sound frequency blocks.



	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch		
14	215/75R14C	8PR	104/101	Q	6J	216 / 8.5	678 / 26.7	900/825	450
15	31 × 10.5R15LT	6PR	109	Q	81/2J	268 / 10.6	775 / 30.5	1030	350
15	P215/75R15LT	8PR	100	S	6J	216 / 8.5	703 / 27.7	950/875	350
15	215/75R15LT	8PR	100/97	S	6J	216 / 8.5	703 / 27.7	800/730	350
15	215/75R15LT	8PR	106/103	S	6J	216 / 8.5	703 / 27.7	950/875	450
15	225/75R15	-	102	S	6J	223 / 8.8	719 / 28.3	850	250
15	235/75R15LT	6PR	104/104	S	61/2J	235 / 9.3	733 / 28.9	900/825	350
15	235/75R15LT	10PR	116/113	Q	61/2J	235 / 9.3	733 / 28.9	1250/1150	550
16	215R16C	6PR	109/107	Q	6J	218 / 8.6	750 / 29.5	1060/1000	375
16	245/75R16LT	10PR	120/116	Q	7J	248 / 9.8	774 / 30.5	1380/1260	550

MK828

ieking

AT


4X4/OFF ROAD

- Rectangle shoulder and wide tread design with 3D multiple thin sipes increases footprint, and enhances wear-resisting performance.
- Wide pyramidal-shaped sipes delivers excellent safety, maintains firm grip performance and aquaplaning resistance .
- Optimized pitching sequence blocks design offers quieter ride.
- Unique lateral flange protector design enhances protection from puncture and impact damage.




	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch		
15	30X9.5R15LT	6PR	104	S	7 1/2 J	240 / 9.4	750 / 29.5	900	350
15	31X10.5R15LT	6PR	109	Q	8 1/2J	268 / 10.6	775 / 30.5	1030	350
15	31X10.5R15LT	6PR	109	S	8 1/2J	268 / 10.6	775 / 30.5	1030	350
15	31X10.5R15LT (White)	6PR	109	Q	8 1/2J	268 / 10.6	775 / 30.5	1030	350
15	31X10.5R15LT (White)	6PR	109	S	8 1/2J	268 / 10.6	775 / 30.5	1030	350
15	LT215/75R15	6PR	100/97	Q	6J	216 / 8.5	703 / 27.7	800/730	350
15	LT215/75R15	6PR	100/97	S	6J	216 / 8.5	703 / 27.7	800/730	350
15	LT215/75R15 (White)	6PR	100/97	Q	6J	216 / 8.5	703 / 27.7	800/730	350
15	LT215/75R15 (White)	6PR	100/97	S	6J	216 / 8.5	703 / 27.7	800/730	350
15	LT225/75R15	6PR	102/99	S	6J	223 / 8.8	719 / 28.3	850/775	350
15	LT235/75R15	6PR	104/101	Q	6 1/2J	235 / 9.3	733 / 28.9	900/825	350
15	LT235/75R15 (White)	6PR	104/101	Q	6 1/2J	235 / 9.3	733 / 28.9	900/825	350
16	225/75R16LT	10PR	115/112	R	6J	223 / 8.8	744 / 29.3	1215/1120	550
16	LT235/70R16	6PR	104/101	Q	6J	240 / 9.4	736 / 29.0	900/825	350
16	LT235/70R16 (White)	6PR	104/101	Q	6J	240 / 9.4	736 / 29.0	900/825	350
16	235/85R16LT	8PR	114/111	R	6 1/2J	235 / 9.3	806 / 31.7	1180/1090	450
16	245/70R16		107	S	7J	248 / 9.8	750 / 29.5	975	300
16	245/70R16 (White)		107	S	7J	248 / 9.8	750 / 29.5	975	300
16	LT245/75R16	10PR	120/116	Q	7J	248 / 9.8	774 / 30.5	1400/1250	550
16	LT265/70R16	8PR	117/114	S	8J	272 / 10.7	778 / 30.6	1285/1180	450
17	225/65R17		102	T	6 1/2J	228 / 9.0	724 / 28.5	850	300
17	235/65R17		104	T	7J	240 / 9.4	738 / 29.1	900	300
17	LT245/65R17	8PR	111/108	S	7J	248 / 9.8	750 / 29.5	1090/1000	450
17	LT245/65R17 (White)	8PR	111/108	S	7J	248 / 9.8	750 / 29.5	1090/1000	450
17	LT265/65R17	10PR	120/117	S	8J	272 / 10.7	776 / 30.6	1400/1285	550
17	LT265/65R17 (White)	10PR	120/117	S	8J	272 / 10.7	776 / 30.6	1400/1285	550
17	LT285/70R17	10PR	121/118	R	8 1/2J	292 / 11.5	832 / 32.8	1450/1320	550
18	235/60R18		103	T	7J	240 / 9.4	739 / 29.1	875	300
18	235/65R18		106	H	7J	240 / 9.4	763 / 30.0	950	300
18	235/65R18 (White)		106	H	7J	240 / 9.4	763 / 30.0	950	300
18	LT265/60R18	10PR	120/117	S	8J	272 / 10.7	775 / 30.5	1400/1285	550
18	LT265/60R18 (White)	10PR	120/117	S	8J	272 / 10.7	775 / 30.5	1400/1285	550
18	LT275/65R18	10PR	123/120	R	8J	279 / 11.0	815 / 32.1	1550/1400	550
18	275/70R18LT	10PR	125/122	Q	8J	279 / 11.0	843 / 33.2	1650/1500	550

Mileking[®] AT

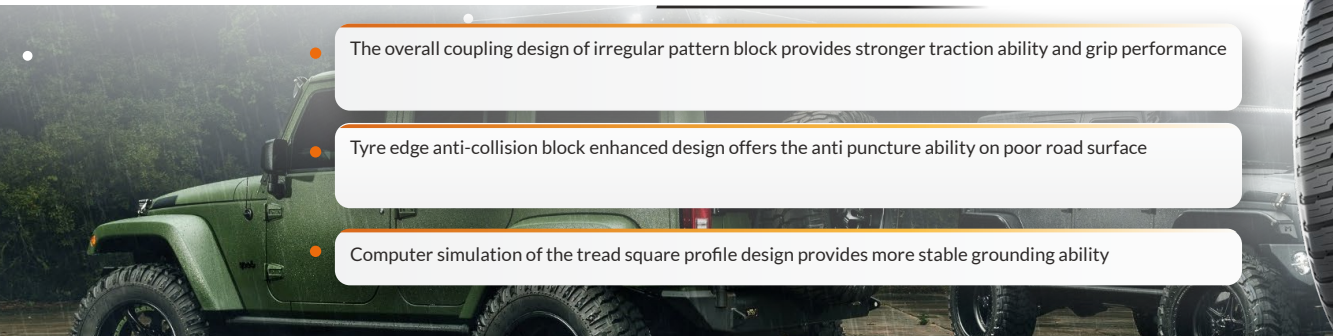- 
- The overall coupling design of irregular pattern block provides stronger traction ability and grip performance
 - Tyre edge anti-collision block enhanced design offers the anti puncture ability on poor road surface
 - Computer simulation of the tread square profile design provides more stable grounding ability

	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch	Single/ Dual	
16	LT265/75R16	10PR	123/120	R	7 1/2 J	267 / 10.5	804 / 31.7	1550/1400	550
16	LT285/75R16	10PR	126/123	R	8J	286 / 11.3	834 / 32.8	1700/1550	550
17	LT265/65R17	10PR	120/117	S	8J	272 / 10.7	776 / 30.6	1400/1285	550
17	LT265/70R17	10PR	121/118	S	8J	272 / 10.7	804 / 31.7	1450/1320	550
17	LT285/70R17	10PR	121/118	R	8 1/2 J	292 / 11.5	832 / 32.8	1450/1320	550
18	LT265/60R18	10PR	120/117	S	8J	272 / 10.7	775 / 30.5	1400/1285	550
18	LT265/65R18	10PR	122/119	R	8J	272 / 10.7	801 / 31.5	1500/1360	550
18	LT275/65R18	10PR	123/120	R	8J	279 / 11.0	815 / 32.1	1550/1400	550
20	LT275/55R20	10PR	120/117	S	8 1/2 J	284 / 11.2	810 / 31.9	1400/1285	550
20	LT305/55R20	10PR	121/118	S	9 1/2 J	316 / 12.4	844 / 33.2	1450/1320	450

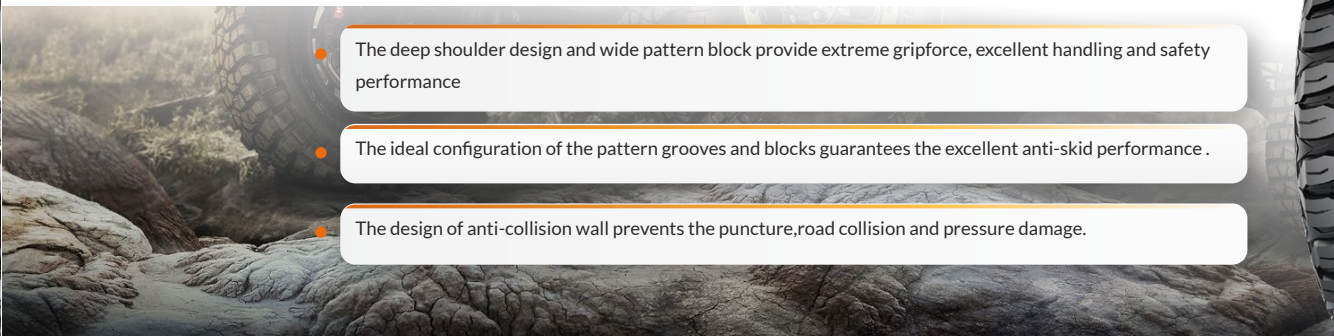- 
- The deep shoulder design and wide pattern block provide extreme gripforce, excellent handling and safety performance
 - The ideal configuration of the pattern grooves and blocks guarantees the excellent anti-skid performance .
 - The design of anti-collision wall prevents the puncture,road collision and pressure damage.

	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch	Single/Dual	
16	LT245/75R16	10PR	120/116	Q	7J	248 / 9.8	780 / 30.7	1400/1250	550
16	LT265/75R16	10PR	123/120	Q	7 1/2J	267 / 10.5	810 / 31.9	1550/1400	550
17	33x12.50R17LT	10PR	120	Q	10J	318 / 12.5	832 / 32.8	1400	450
17	35x12.50R17LT	10PR	125	Q	10J	318 / 12.5	883 / 34.8	1650	450
17	LT285/70R17	10PR	121/118	Q	8 1/2J	292 / 11.5	838 / 33.0	1450/1320	550
18	33x12.50R18LT	10PR	118	Q	10J	318 / 12.5	832 / 32.8	1320	450
18	35x12.50R18LT	10PR	123	Q	10J	318 / 12.5	883 / 34.8	1550	450
20	33x12.50R20LT	10PR	114	Q	10J	318 / 12.5	832 / 32.8	1180	450
20	35x12.50R20LT	10PR	121	Q	10J	318 / 12.5	883 / 34.8	1450	450
20	P275/60R20	-	115	S	8J	279 / 11.0	844 / 33.2	1215	300
20	LT275/65R20	10PR	126/123	Q	8J	279 / 11.0	872 / 34.3	1700/1550	550
22	33x12.50R22LT	10PR	114	Q	10J	318 / 12.5	832 / 32.8	1180	450
22	35x12.50R22LT	10PR	117	Q	10J	318 / 12.5	883 / 34.8	1285	450
24	35x12.50R24LT	10PR	117	Q	10J	318 / 12.5	883 / 34.8	1285	450

4X4/OFF ROAD

- 
- Opened cross-grooves/shoulders provide better capability with self-cleaning and grasp, improved the traffic-ability on mud/damaged road.
 - The utilization with wave-shape steel plates greatly improved the grasp of the tyre.
 - The toothed grooves make the tyre have better self-cleaning ability and improve the grip and passability on damaged roads.
 - The anti-collision rib avoids stone trapping, and improves the puncture resistance of the tyre.



	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch	Single/Dual	
15	32X11.50R15LT	6PR	113	Q	9J	290 / 11.5	807 / 31.8	1150	350
15	33X12.50R15LT	6PR	108	Q	10J	318 / 12.5	832 / 30.8	1000	250
15	35X12.50R15LT	6PR	113	Q	10J	318 / 12.5	883 / 31.8	1150	250
16	LT235/85R16	10PR	120/116	R	6 1/2J	235 / 85	812 / L4.8	1400/1250	550
16	LT245/75R16	10PR	120/116	Q	7J	248 / 75	780 / L4.8	1400/1250	550
16	LT265/75R16	10PR	123/120	Q	7 1/2J	267 / 75	810 / L5.8	1550/1400	550
16	LT285/75R16	10PR	126/123	Q	8J	286 / 75	840 / L7.8	1700/1550	550
16	LT305/70R16	10PR	124/121	Q	9J	311 / 70	834 / L6.8	1600/1450	450
16	LT315/75R16	10PR	127/124	Q	8 1/2J	313 / 75	878 / L7.8	1750/1600	450
17	33X12.50R17LT	10PR	120	Q	10J	318 / 12.5	832 / 34.8	1400	450
17	37X12.50R17LT	8PR	124	Q	10J	318 / 12.5	934 / 36.8	1600	350
17	LT235/80R17	10PR	120/117	Q	6 1/2J	235 / 80	808 / L4.8	1400/1285	550
17	LT245/75R17	10PR	121/118	Q	7J	248 / 75	800 / L4.8	1450/1320	550
17	LT255/75R17	6PR	111/108	Q	7J	255 / 75	814 / L0.8	1090/1000	350
18	33X12.50R18LT	10PR	118	Q	10J	318 / 12.5	832 / 33.8	1320	450
20	33X12.50R20LT	12PR	119	Q	10J	318 / 12.5	832 / 33.8	1360	550
20	35X12.50R20LT	12PR	125	Q	10J	318 / 12.5	883 / 36.8	1650	550
20	37X13.50R20LT	10PR	127	Q	11J	345 / 13.5	934 / 37.8	1750	450
20	LT275/55R20	10PR	120/117	Q	8 1/2J	284 / 55	810 / L4.8	1400/1285	550
20	279/60S20S	10PR	123/120	S	8J	279 / 60	844 / L5.8	1550/1400	550
20	LT285/55R20	10PR	122/119	Q	9J	297 / 55	822 / L5.8	1500/1360	550
20	LT305/55R20	10PR	121/118	Q	9 1/2J	316 / 55	844 / L4.8	1450/1320	550
22	33X12.50R22LT	12PR	114	Q	10J	318 / 12.5	832 / 31.8	1180	550
22	33X14.50R22LT	12PR	117	Q	12J	372 / 14.5	832 / 32.8	1285	550
22	35X12.50R22LT	12PR	121	Q	10J	318 / 12.5	883 / 34.8	1450	550
24	33X12.50R24LT	10PR	104	Q	10J	318 / 12.5	832 / 30.8	900	450
24	35X12.50R24LT	10PR	117	Q	10J	318 / 12.5	883 / 32.8	1285	450
24	37X13.50R24LT	12PR	126	Q	11J	345 / 13.5	934 / 37.8	1700	550
24	LT365/45R24	12PR	125	Q	11 1/2J	365 / 45	935 / L6.8	1650	550
26	33X12.50R26LT	10PR	114	Q	10J	318 / 12.5	832 / 31.8	1180	450
26	35X13.50R26LT	10PR	118	Q	11J	345 / 13.5	883 / 33.8	1320	450
26	37X13.50R26LT	12PR	117	Q	11J	345 / 13.5	934 / 32.8	1285	550
28	37X14.50R28LT	12PR	118	Q	11 1/2J	368 / 14.5	935 / 33.8	1320	550
28	40X15.50R28LT	10PR	126	Q	12J	389 / 15.5	1011 / 47.8	1700	450
30	42X13.50R30LT	12PR	125	Q	11J	343 / 13.5	1062 / 46.8	1650	550
30	42X16.50R30LT	10PR	127	Q	13 1/2J	419 / 16.5	1062 / 47.8	1750	450

4Y4/OFF ROAD

- extreme grip & handling with the strong shoulder & unique wide pattern
- The anti-collision design is to prevent the puncture, road collision and pressure damage.



	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch	Single/Dual	
16	LT265/75R16	10PR	123/120	S	7 1/2J	267 / 10.5	810 / 31.9	1550/1400	550
16	LT285/75R16	10PR	126/123	S	8J	286 / 11.3	840 / 33.1	1700/1550	550
17	33x12.50R17LT	10PR	120	Q	10J	318 / 12.5	832 / 32.8	1400	450
17	35x12.50R17LT	10PR	125	Q	10J	318 / 12.5	883 / 34.8	1650	450
17	P265/70R17	-	115	T	8J	272 / 10.7	810 / 31.9	1215	300
17	LT265/70R17	10PR	121/118	S	8J	272 / 10.7	810 / 31.9	1450/1320	550
17	P285/70R17	-	117	T	8 1/2J	292 / 11.5	838 / 33.0	1285	300
17	LT285/70R17	10PR	121/118	S	8 1/2J	292 / 11.5	838 / 33.0	1450/1320	550
18	33x12.50R18LT	10PR	118	Q	10J	318 / 12.5	832 / 32.8	1320	450
18	35x12.50R18LT	10PR	123	Q	10J	318 / 12.5	883 / 34.8	1550	450
18	37x13.50R18LT	8PR	124	Q	11J	345 / 13.6	934 / 36.8	1600	350
20	33x12.50R20LT	10PR	114	Q	10J	318 / 12.5	832 / 32.8	1180	450
20	35x12.50R20LT	10PR	121	Q	10J	318 / 12.5	883 / 34.8	1450	450
20	37x13.50R20LT	10PR	127	Q	11J	345 / 13.6	934 / 36.8	1750	450
20	P275/60R20	-	115	T	8J	279 / 11.0	844 / 33.2	1215	300
22	33x12.50R22LT	10PR	114	Q	10J	318 / 12.5	832 / 32.8	1180	450
22	35x12.50R22LT	10PR	117	Q	10J	318 / 12.5	883 / 34.8	1285	450
24	33x12.50R24LT	10PR	104	Q	10J	318 / 12.5	832 / 32.8	900	450
24	33x14.50R24LT	10PR	110	Q	12J	372 / 14.6	832 / 32.8	1060	450

MK877

4X4/OFF ROAD

- Robust pattern with unique longitudinal and transverse grooves for strong impact resistance, cut resistance, and superior traction.
- Rectangular tire shoulders and wide tread with wear-resistant compound for excellent driving mileage.
- Unique shoulder design for anti-collision, thickened sidewalls for cut, peel, and tear resistance.



	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch		
15	P205/70R15	-	96	T	6J	209 / 8.2	669 / 26.3	710	300
16	LT235/70R16	8PR	110/107	Q	7J	240 / 9.4	736 / 29.0	1060/975	450
16	LT245/70R16	8PR	113/110	Q	7J	248 / 9.8	750 / 29.5	1150/1060	450
16	LT255/70R16	8PR	115/112	Q	7 1/2J	260 / 10.2	764 / 30.1	1215/1120	450
16	P265/70R16	-	112	T	8J	272 / 10.7	778 / 30.6	1120	300
17	LT245/70R17	10PR	119/116	R	7J	248 / 9.8	776 / 30.6	1360/1250	550
17	LT265/65R17	10PR	120/117	Q	8J	272 / 10.7	776 / 30.6	1400/1285	550
18	LT255/60R18	10PR	117/114	R	7 1/2J	260 / 10.2	763 / 30.0	1280/1180	550
18	P265/60R18	-	114	H	8J	272 / 10.7	775 / 30.5	1180	340
18	LT285/60R18	10PR	122/119	Q	8 1/2J	292 / 11.5	799 / 31.5	1500/1360	550
20	33×12.50R20LT	10PR	119	R	10J	318 / 12.5	832 / 32.8	1360	550

MK665

SPECIAL

- The design with widened and big pattern blocks enlarged the contacting area and rigidity, which effectively resisted the wearing, improved the tyre life. The control-ability on dry/wet road and steer-ability is excellent.
- New formula reduces 30%-40% rolling resistance, fuel consumption and CO2 emission load.
- The alkene rubber matched with high structure wearing resistance V10H-UH carbon black, together with the new mixing technology and highwearing resistance receipt, ensure long milage performance.



	SIZE	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
					(mm)/inch	(mm)/inch		
14	175/70R14	84	T	5 J	177 / 7.0	602 / 23.7	500	300
15	195/60R15	88	H	6 J	201 / 7.9	615 / 24.2	560	300
15	195/65R15	91	H	6 J	201 / 7.9	635 / 25.0	615	300
16	205/55R16	91	V	6 1/2 J	214 / 8.4	632 / 24.9	615	300
16	205/60R16	92	H	6 J	209 / 8.2	652 / 25.7	630	300
16	215/70R16	100	T	6 1/2 J	221 / 8.7	708 / 27.9	800	300
17	205/50R17	93	V	6 1/2 J	214 / 8.4	638 / 25.1	650	340
17	215/50R17	95	V	7 1/2 J	226 / 8.9	648 / 25.5	690	340
17	225/65R17	102	H	6 1/2 J	228 / 9.0	724 / 28.5	850	300

MK228

**VAN**
VAN/CARGO

- Exceptional anti-skid with longitudinal grooves, wetland grip for safety.
- Robust blocky pattern resists punctures, ensures high traction, outstanding grip.

	SIZE	PR	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
					(mm)/inch	(mm)/inch		
13	165R13LT	8PR	S	4.50B	165 / 6.5	595 / 23.4	670/640	450



MK501

**VAN**
VAN/CARGO

- High Quality design with deep grooves pattern and wide tread surface provide excellent endurance performance.
- Simple and continuous design with big pattern block and smooth lengthwise grooves provide excellent steering and drainage performance.
- The pattern design with wide shoulder enhanced the grounding performance, improved the stability when turning and ensured the safety of driving.

	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch		
14	165R14LT	8PR	96/95	S	4 1/2J	165 / 6.5	620 / 24.4	710/690	450
14	175/70R14C	8PR	99/95	S	5J	177 / 7.0	602 / 23.7	775/690	450
14	175/75R14C	8PR	99/98	S	5J	177 / 7.0	618 / 24.3	775/750	475
14	175R14C	8PR	99/97	S	5J	177 / 7.0	636 / 25.0	775/730	450
14	185/70R14C	8PR	102/100	S	5 1/2J	189 / 7.4	616 / 24.3	850/800	450
14	185R14C	8PR	102/100	R	5 1/2J	189 / 7.4	652 / 25.7	900/850	450
15	195/70R15LT	10PR	104/101	S	6J	201 / 7.9	655 / 25.8	900/825	550
15	225/70R15C	10PR	112/110	R	6J	228 / 9.0	697 / 27.4	1120/1060	550
16	215/75R16C	10PR	112/109	R	6.5J	216 / 8.5	728 / 28.7	1120/1030	550



MK506

 **VAN**
VAN/CARGO



- High Quality design with deep grooves pattern and wide tread surface provide excellent endurance performance.
- Simple and continuous design with big pattern block and smooth lengthwise grooves provide excellent steering and drainage performance.
- The pattern design with wide shoulder enhanced the grounding performance, improved the stability when turning and ensured the safety of driving.



	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch		
12	225/55R12C	6PR	93	N	7J	233 / 9.2	553 / 21.8	650	350

MK517

 **VAN**
VAN/CARGO



- MK517 tire ensures maximum cost-effectiveness with exceptional durability.
- Wide tread, deep grooves, and superior compound for extended lifespan.
- Robust shoulder blocks, three grooves for superior dry/wet handling.
- Reinforced body design improves impact resistance and tire durability.



	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch		
14	175/70R14LT	6PR	95/93	S	5J	177 / 7.0	602 / 23.7	690/650	375
14	175/75R14C	8PR	99/98	R	5J	177 / 7.0	618 / 24.3	670/630	450
14	175R14LT	8PR	99/97	R	5J	177 / 7.0	636 / 25.0	775/730	450
14	185/65R14	-	90	S	51/2J	189 / 7.4	596 / 23.5	600	290
14	185/70R14	-	92	S	51/2J	189 / 7.4	616 / 24.3	630	290

MK717

Meiking

VAN

VAN/CARGO

- The extra-strong structure ensures excellent braking and steering ability, suitable for various harsh road & weather conditions.Extra-deep pattern grooves and outstanding tread compound improve the anti-wearing capability for longer tyre life.
- Classical zigzag grooves and well-arranged fine patterns and robust blocks provide excellent gripping performance.



	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch		
14	185R14C	8PR	102/100	Q	5 1/2J	188 / 7.4	652 / 25.7	840/800	450
14	185R14C	8PR	102/100	S	5 1/2J	188 / 7.4	652 / 25.7	840/800	450
14	195R14C	8PR	106/104	Q	5 1/2J	198 / 7.8	668 / 26.3	935/890	450
14	195R14C	8PR	106/104	S	5 1/2J	198 / 7.8	668 / 26.3	935/890	450
14	195R14C(White)	8PR	106/104	Q	5 1/2J	198 / 7.8	668 / 26.3	935/890	450
14	195R14C	8PR	106/104	S	5 1/2J	198 / 7.8	668 / 26.3	935/890	450
14	205/70R14	-	98/XL	T	6J	209 / 8.2	644 / 25.4	750	270
14	205/80R14	-	98	S	5 1/2J	203 / 8.0	710 / 28.0	750	250
14	215/75R14C/LT	8PR	104/101	Q	6J	216 / 8.5	678 / 26.7	900/825	450
15	195/70R15C	8PR	99/96	Q	6J	201 / 7.9	655 / 25.8	900/850	450
15	195/70R15C	8PR	99/96	S	6J	201 / 7.9	655 / 25.8	900/850	450
15	195/70R15LT	10PR	104/101	Q	6J	201 / 7.9	655 / 25.8	900/825	550
15	195R15C	8PR	106/104	S	5.50F	196 / 7.7	693 / 27.3	950/900	450

MK737

Meiking


VAN

VAN/CARGO

- Strong shoulder blocks and unique decoupling longitude grooves provide stable steerability and irregular anti-wearing on various road conditions.
- Three wide longitude water outlet slots and balanced pattern blocks enhance water discharging on slippery road and provide excellent steerability of the vehicle.Durability ensures long mileage and good load capacity.



	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch		
14	185R14C	8PR	102/100	R	5 1/2J	188 / 7.4	650 / 27.5	850/800	450
14	195R14C	8PR	106/104	R	5 1/2J	693 / 27.3	196 / 27.5	950/900	450
15	195/70R15C	8PR	104/102	R	6J	201 / 7.9	655 / 27.5	900/850	450
15	195/70R15C	8PR	104/102	S	6J	201 / 7.9	655 / 27.5	900/850	450
15	195R15C	8PR	106/104	S	5 1/2J	693 / 27.3	196 / 27.5	950/900	450
15	205/70R15C	8PR	106/104	R	6J	209 / 8.2	669 / 27.5	950/900	450
15	215/70R15LT	8PR	104/101	R	6 1/2J	221 / 8.7	683 / 27.5	900/825	450
15	215/70R15C	8PR	109/107	R	6 1/2J	221 / 8.7	683 / 27.5	1030/975	450
15	215/70R15LT	6PR	98/95	R	6 1/2J	221 / 8.7	683 / 27.5	750/690	350
15	225/70R15C	10PR	112/110	R	6 1/2J	228 / 9.0	697 / 27.5	1120/1060	550
16	185/75R16C	8PR	104/102	R	5 J	184 / 7.2	684 / 27.5	900/850	475
16	195/75R16C	8PR	107/105	R	5 1/2J	196 / 7.7	698 / 27.5	975/925	475
16	205/65R16C	8PR	107/105	T	6J	209 / 8.2	672 / 27.5	975/925	475
16	205/75R16C	8PR	110/108	R	5 1/2J	203 / 8.0	714 / 27.5	1060/100	475
16	215/65R16C	8PR	109/107	T	6 1/2J	221 / 8.7	686 / 27.5	1030/975	475
16	215/75R16C	10PR	116/114	R	6J	216 / 8.5	728 / 27.5	1250/1180	525
16	225/65R16C	8PR	112/110	T	6 1/2J	228 / 9.0	698 / 27.5	1120/1060	475
16	235/65R16C	8PR	115/113	T	7J	240 / 9.4	712 / 27.5	1215/1150	475
16	235/65R16C	10PR	121/119	Q	7J	240 / 9.4	712 / 27.5	1450/1360	575

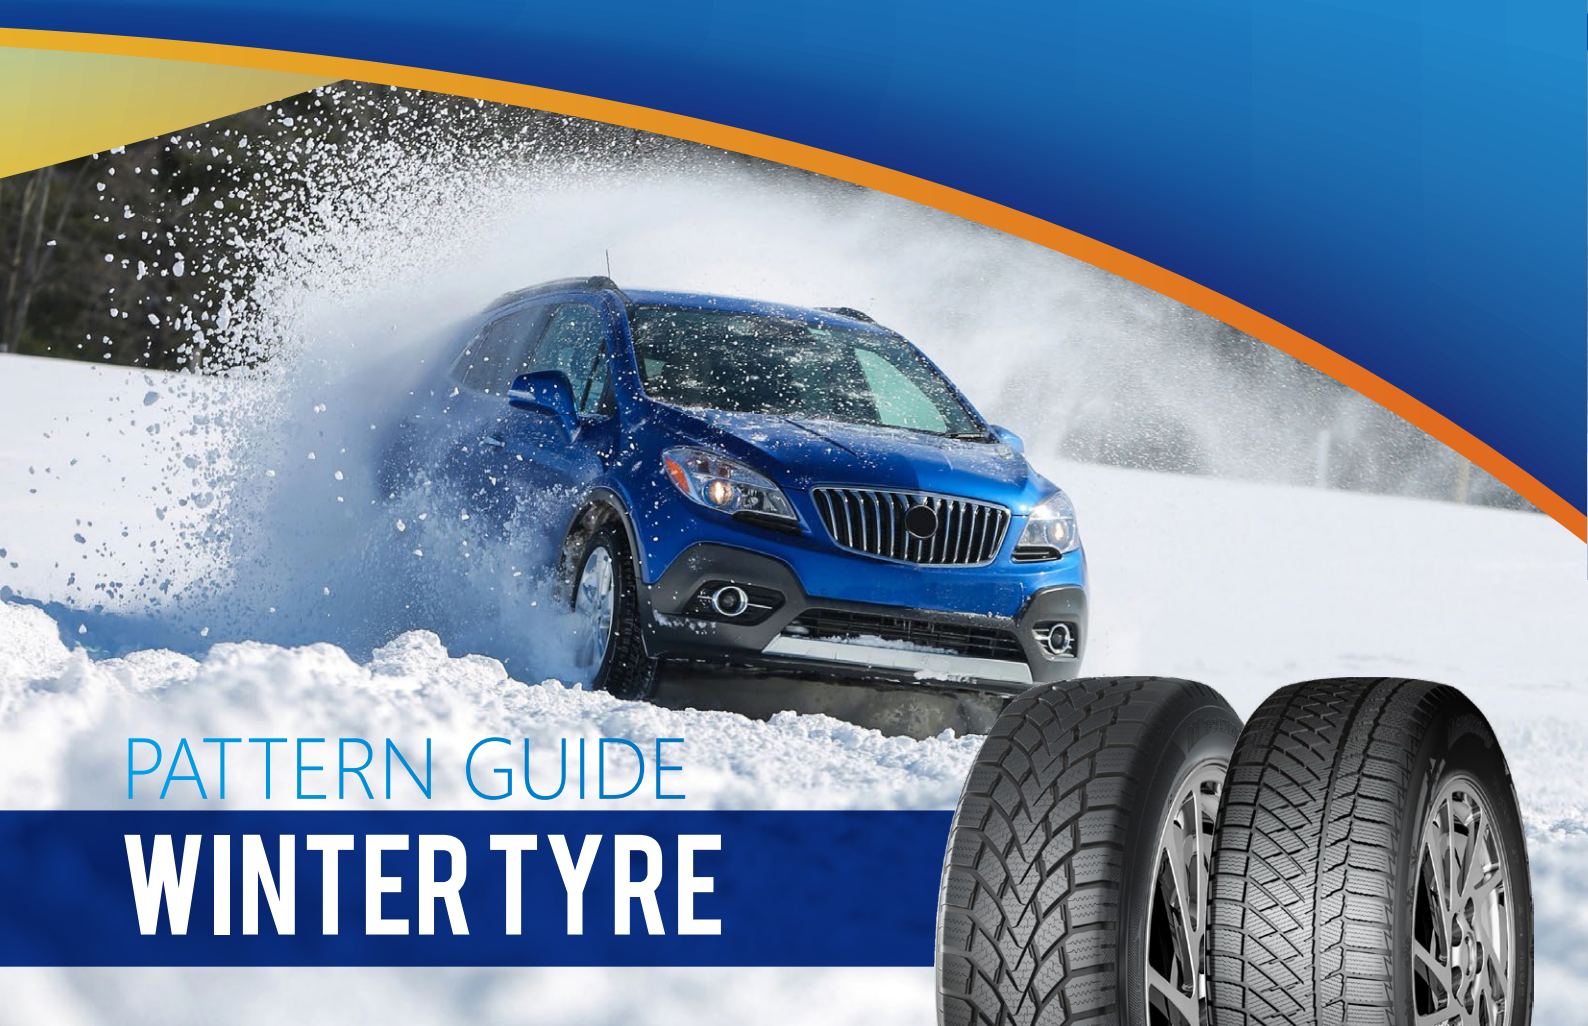

PATTERN GUIDE

WINTER TYRE

HP/UHP

SUV

VAN

STUDDABLE

MK617 **HP/UHP**

WINTER TYRE

- The wide pattern design with new 3D sawtooth-style fine sipe greatly improves the grasp of the tread and effectively reduces skidding on icy and snowy roads.
- The special sipe design with unidirection and V shape increases the drainage performance and improves gripping performance.
- The materials such as silica etc are added in the tread compound, which is low-temperature resistance with excellent adhesion.



	SIZE	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
					(mm)/inch	(mm)/inch		
13	165/70R13	83XL	T	5.00B	170 / 6.7	562 / 22.1	487	340
13	175/70R13	82	T	5.00B	177 / 7.0	576 / 22.7	475	300
14	165/70R14	81	T	5.00B	170 / 6.7	588 / 23.1	462	300
14	175/65R14	82	T	5J	177 / 7.0	584 / 23.0	475	300
14	175/70R14	84	T	5J	177 / 7.0	602 / 23.7	500	300
14	185/60R14	82	T	5 1/2J	189 / 7.4	578 / 22.8	475	300
14	185/65R14	90XL	T	5 1/2J	189 / 7.4	596 / 23.5	600	340
14	185/70R14	88	T	5 1/2J	189 / 7.4	616 / 24.3	560	300
14	195/60R14	86	Q	6J	201 / 7.9	590 / 23.2	530	300
15	185/60R15	84	T	5 1/2J	189 / 7.4	603 / 23.7	500	300
15	185/65R15	88	T	5 1/2J	189 / 7.4	621 / 24.4	560	300
15	195/55R15	85	T	6J	201 / 7.9	595 / 23.4	515	300
15	195/60R15	88	T	6J	201 / 7.9	615 / 24.2	560	300
15	195/65R15	91	T	6J	201 / 7.9	635 / 25.0	615	300
15	205/65R15	94	T	6J	209 / 8.2	647 / 25.5	670	300
16	195/55R16	91 XL	H	6J	201 / 7.9	620 / 24.4	615	340
16	205/55R16	91	T	6 1/2J	214 / 8.4	632 / 24.9	615	300
16	205/60R16	96 XL	T	6J	209 / 8.2	652 / 25.7	710	340
16	215/55R16	97 XL	T	7J	226 / 8.9	642 / 25.3	730	340
16	215/60R16	95	T	6 1/2J	221 / 8.7	664 / 26.1	690	300
16	215/65R16	98	T	6 1/2J	221 / 8.7	686 / 27.0	750	300
16	225/55R16	99 XL	T	7J	233 / 9.2	654 / 25.7	775	340
16	225/60R16	102XL	T	6 1/2J	228 / 9.0	676 / 26.6	850	340
16	225/65R16	100	T	6 1/2J	228 / 9.0	698 / 27.5	800	300
17	215/45R17	91 XL	V	7J	213 / 8.4	626 / 24.6	615	340
17	215/50R17	95XL	H	6 1/2J	214 / 8.4	638 / 25.1	690	340
17	215/55R17	94	T	7J	226 / 8.9	668 / 26.3	670	300
17	225/45R17	94 XL	H	7 1/2J	225 / 8.9	634 / 25.0	670	340
17	225/50R17	98 XL	H	7J	233 / 9.2	658 / 25.9	750	340
17	225/55R17	101 XL	H	7J	233 / 9.2	680 / 26.8	825	340
17	225/65R17	102	T	6 1/2J	228 / 9.0	724 / 28.5	850	300
17	235/45R17	97 XL	H	8J	236 / 9.3	644 / 25.4	730	340
17	235/55R17	99	T	7 1/2J	245 / 9.6	690 / 27.2	775	300
18	225/40R18	92 XL	H	8J	230 / 9.1	637 / 25.1	630	340
18	225/45R18	95XL	H	7 1/2J	225 / 8.9	659 / 25.9	690	350
18	245/40R18	93	V	8 1/2J	248 / 9.8	653 / 25.7	650	300
18	245/45R18	100 XL	V	8J	243 / 9.6	677 / 26.7	800	340

MK687

 **HP/UHP**
WINTER TYRE

- Zigzag pattern grooves provide water drainage performance on wet road and excellent steer-ability on snow/ice road.
- Arc sipes and segmentation pattern design improves tyre grip ability and ensures your safety.
- Multiple small zigzag pattern provides excellent snow removal capacity. Meanwhile it can reduce and even the noise.



	SIZE	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
					(mm)/inch	(mm)/inch		
14	175/65R14	82	T	5J	177 / 7.0	584 / 23.0	475	300
14	185/65R14	90XL	T	5 1/2 J	189 / 7.4	596 / 23.5	600	340
15	185/55R15	82	T	6 J	194 / 7.6	585 / 23.0	475	300
15	185/60R15	88XL	T	5 1/2 J	189 / 7.4	603 / 23.7	560	340
15	185/65R15	92XL	T	5 1/2 J	189 / 7.4	621 / 24.4	630	340
15	195/50R15	82	H	6 J	201 / 7.9	577 / 22.7	475	300
15	195/65R15	95XL	T	6J	201 / 7.9	635 / 25.0	690	340
16	205/55R16	94XL	T	6 1/2 J	214 / 8.4	632 / 24.9	670	340
16	205/60R16	96XL	T	6J	209 / 8.2	652 / 25.7	710	340
16	215/55R16	97XL	T	7J	226 / 8.9	642 / 25.3	730	340
16	215/60R16	99XL	T	6 1/2 J	221 / 8.7	664 / 26.1	775	340
16	215/65R16	102XL	T	6 1/2 J	221 / 8.7	686 / 27.0	850	340
16	245/70R16	107	T	7 J	248 / 9.8	750 / 29.5	975	300
17	205/50R17	93XL	T	6 1/2 J	214 / 8.4	638 / 25.1	650	340
17	205/55R17	95XL	H	6 1/2 J	214 / 8.4	658 / 25.9	690	340
17	215/55R17	98XL	T	7J	226 / 8.9	668 / 26.3	750	340
17	225/45R17	94XL	T	7 1/2 J	225 / 8.9	634 / 25.0	670	340
17	225/50R17	98XL	T	7J	233 / 9.2	658 / 25.9	750	340
17	225/55R17	101XL	T	7J	233 / 9.2	680 / 26.8	825	340
17	225/60R17	103XL	T	6 1/2 J	228 / 9.0	702 / 27.6	875	340
17	225/65R17	106XL	T	6 1/2 J	228 / 9.0	724 / 28.5	950	340
17	245/65R17	107	T	7 J	248 / 9.8	750 / 29.5	975	300
18	215/55R18	99XL	H	7 J	226 / 8.9	693 / 27.3	775	340
18	225/55R18	102XL	T	7J	233 / 9.2	705 / 27.8	850	340
18	225/60R18	104XL	T	6 1/2 J	228 / 9.0	727 / 28.6	900	340
18	235/60R18	107XL	T	7J	240 / 9.4	739 / 29.1	975	340
18	245/45R18	100XL	T	8J	243 / 9.6	677 / 26.7	800	340
18	265/60R18	114XL	T	8J	272 / 10.7	775 / 30.5	1180	340
18	285/60R18	116	T	8 1/2J	292 / 11.5	799 / 31.5	1250	300
19	225/55R19	99H	H	7 J	233 / 9.2	731 / 28.8	775	300
19	235/35R19	91XL	V	8 1/2 J	241 / 9.5	647 / 25.5	615	340
19	235/55R19	105XL	H	7 1/2 J	245 / 9.6	741 / 29.2	925	340
19	245/45R19	102XL	H	8 J	243 / 9.6	703 / 27.7	850	340
19	255/40R19	100XL	V	9 J	260 / 10.2	687 / 27.0	800	340
19	255/50R19	107XL	T	8 J	265 / 10.4	739 / 29.1	975	340

MK617suv

 **SUV**
WINTER TYRE

- The wide tyre and new 3D sawtooth fine seam pattern design increase the gripping of the tread and effectively reduce skidding on icy and snowy roads. The unidirectional V-shaped wide groove design increases water and snow drainage ability, and improves braking performance and safe handling in winter. Silicon contained formula improves low temperature resistance and adhesion on icy and snowy roads.
- The projected small sharp angle ensures the reliable contact of the tyre and the road under low temperature, which also enhances the gripping ability. The special design with directional pattern and various 3D steel sheets effectively enhances the grasp capability.



	SIZE	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
					(mm)/inch	(mm)/inch		
15	215/70R15	98	T	6.5J	221 / 8.7	683 / 26.9	750	300
15	235/75R15	105	Q	6 1/2J	235 / 9.3	733 / 28.9	925	300
16	215/70R16	100	Q	6 1/2J	221 / 8.7	708 / 27.9	800	300
16	235/70R16	106	Q	7J	240 / 9.4	736 / 29.0	950	300
17	215/60R17	96	T	6 1/2J	221 / 8.7	690 / 27.2	710	300
17	225/60R17	99	T	6.5J	228 / 9.0	702 / 27.6	775	300
17	235/65R17	104	T	7J	240 / 9.4	738 / 29.1	900	300
17	265/65R17	112	T	8J	272 / 10.7	776 / 30.6	1120	300
17	265/70R17	115	T	8J	272 / 10.7	804 / 31.7	1215	300
17	275/65R17	115	T	8J	279 / 11.0	790 / 31.1	1215	300
18	235/55R18	104 XL	T	7 1/2J	245 / 9.6	715 / 28.1	900	340
18	235/60R18	103	T	7J	240 / 9.4	739 / 29.1	875	300
18	275/65R18	116	T	8J	279 / 11.0	815 / 32.1	1250	300
20	275/55R20	117 XL	T	8 1/2J	284 / 11.2	810 / 31.9	1285	340
20	275/60R20	115	T	8J	279 / 11.0	838 / 33.0	1250	300

MK627

 **VAN**
WINTER TYRE

- Shoulder with rectangular shape and integrated coupling style enhance the load capability and stable steerability on icy pavement. The design with three lengthwise zigzag grooves provide better water and snow discharging ability, and it also improves the steerability under slippery condition. The projected small sharp angle ensures the reliable contact of the tyre and the ground surface under low temperature.
- The special design with directional pattern or various 3D steel sheets effectively enhances the grasp capability on icy and snowy roads.



	SIZE	PR	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure
						(mm)/inch	(mm)/inch	Single/Dual	
14	175/70R14C	8PR	99/95	Q	5J	177 / 7.0	602 / 23.7	775/690	450
14	175/75R14C	8PR	99/98	Q	5J	177 / 7.0	618 / 24.3	670/630	450
14	185R14C	8PR	102/100	Q	5 1/2J	189 7.4	652 / 25.7	900/850	450
15	195/70R15C	8PR	104/102	R	6J	201 / 7.9	655 / 25.8	900/850	450
15	205/70R15C	8PR	106/104	R	6J	209 / 8.2	669 / 26.3	950/900	450
15	215/70R15C	8PR	109/107	R	6 1/2J	221 / 8.7	683 / 26.9	1030/975	450
15	225/70R15C	8PR	112/110	R	6 1/2J	228 / 9.0	697 / 27.4	1120/1060	450
16	185/75R16C	8PR	104/102	R	5J	184 / 7.2	684 / 26.9	900/850	475
16	195/75R16C	8PR	107/105	R	5 1/2J	196 / 7.7	698 / 27.5	975/925	475
16	205/65R16C	8PR	107/105	T	6J	209 / 8.2	672 / 26.5	975/975	475
16	215/65R16C	8PR	109/107	R	6 1/2J	221 / 8.7	686 / 27.0	1030/975	475
16	215/75R16C	8PR	113/111	R	6J	216 / 8.5	728 / 28.7	1150/1090	475
16	225/65R16C	8PR	112/110	R	6 1/2J	228 / 9.0	698 / 27.5	900/850	450
16	235/65R16C	8PR	115/113	R	7J	240 / 9.4	712 / 28.0	1215/1150	475
16	235/65R16C	10PR	121/119	R	7J	240 / 9.4	712 / 28.0	1450/1360	575

MK677

 **STUDDABLE**
WINTER TYRE

- The design with 3D grooves increases the grasp force and the rigidity to ensure better stability of steerability.
- The optimized design arrangement of stud hole increases the grasp force on snow/icy road and reduces the noise while providing better steer ability and traction force.
- The design with directional V-Shape grooves can effectively drainage the snow and water to provide better traction and grasp force on the snow/icy road.



SIZE	Load Index	Speed	Standard Rim	Section Width	Overall Diameter	Loading Capacity	Pressure	
				(mm)/inch	(mm)/inch	Single/Dual		
				PCR				
13	175/70R13	82	T	5.00B	225 / 8.9	576 / 22.7	475	300
14	175/65R14	86 XL	T	5J	177 / 7.0	584 / 23.0	530	340
14	185/65R14	90 XL	T	5 1/2J	177 / 7.0	596 / 23.5	600	340
14	185/70R14	92 XL	T	5 1/2J	189 / 7.4	616 / 24.3	630	340
15	185/55R15	86T XL	T	6J	279 / 11.0	585 / 23.0	530	340
15	185/60R15	88 XL	T	5 1/2J	189 / 7.4	603 / 23.7	560	340
15	185/65R15	92XL	T	5 1/2J	189 / 7.4	621 / 24.4	630	340
15	195/65R15	95 XL	T	6J	189 / 7.4	635 / 25.0	690	340
15	205/65R15	99 XL	T	6J	201 / 7.9	647 / 25.5	775	340
16	195/55R16	91T XL	T	6J	194 / 7.6	620 / 24.4	615	340
16	205/55R16	94 XL	T	6 1/2J	209 / 8.2	632 / 24.9	670	340
16	205/60R16	96 XL	T	6J	214 / 8.4	652 / 25.7	710	340
16	215/60R16	99 XL	T	6 1/2J	209 / 8.2	664 / 26.1	775	340
17	205/50R17	93T XL	T	6 1/2J	201 / 7.9	638 / 25.1	650	340
17	215/50R17	95T XL	T	7J	214 / 8.4	648 / 25.5	690	340
17	215/55R17	98XL	T	7J	221 / 8.7	668 / 26.3	750	340
17	225/45R17	94XL	T	7 1/2J	233 / 9.2	634 / 25.0	670	340
17	225/50R17	98 XL	T	7J	233 / 9.2	658 / 25.9	750	340
17	225/55R17	101 XL	T	7J	226 / 8.9	680 / 26.8	825	340
17	235/55R17	99T	T	7 1/2J	226 / 8.9	690 / 27.2	775	300
18	225/40R18	92T XL	T	8J	245 / 9.6	637 / 25.1	630	340
18	225/45R18	95T XL	T	7 1/2J	230 / 9.1	659 / 25.9	690	340
18	235/55R18	104T XL	T	7 1/2J	225 / 8.9	715 / 28.1	900	340
18	235/60R18	107T XL	T	7J	245 / 9.6	739 / 29.1	975	340
18	245/45R18	100T XL	T	8J	245 / 9.6	677 / 26.7	800	340
19	235/55R19	105T XL	T	7 1/2J	243 / 9.6	741 / 29.2	925	340
SUV								
16	215/65R16	102 XL	T	6 1/2J	292 / 11.5	686 / 27.0	850	340
16	265/70R16	112	T	8J	240 / 9.4	778 / 30.6	1120	300
17	215/60R17	100 XL	T	6 1/2J	221 / 8.7	690 / 27.2	800	340
17	225/60R17	103 XL	T	6 1/2J	221 / 8.7	701 / 27.6	875	340
17	225/65R17	106 XL	T	6 1/2J	228 / 9.0	724 / 28.5	950	340
17	235/65R17	108 XL	T	7J	228 / 9.0	738 / 29.1	1000	340
17	265/65R17	116XL	T	8J	272 / 10.7	776 / 30.6	1250	340
18	235/45R18	98XL	T	8J	225 / 8.9	669 / 26.3	750	340
18	265/60R18	114XL	T	8J	272 / 10.7	775 / 30.5	1180	340
18	LT275/65R18	123/120	Q	8J	279 / 11.0	815 / 32.1	1550/1400	550
18	LT275/70R18	125/122	Q	8J	272 / 10.7	843 / 33.2	1650/1500	550
18	285/60R18	116	T	8 1/2J	236 / 9.3	799 / 31.5	1250	300



QINGDAO NEW KETER TYRE CO., LTD

ADD: 25FL, Darron Center, No.180 Haier Road, Qingdao, China, 266100

Tel: 86-532-55579147, 86-532-55579148

Fax: 86-532-55579145 E-mail: info@ketertyre.com